

110-170 GHz Subharmonic Mixer 次谐波混频器

描述Description

The LFC-6005 is a subharmonic mixer which operates between 110 and 170 GHz.


特点Feature

- Compact Package
- Low LO Power Requirement

产品规格Specifications	
RF频率RF Frequency [GHz]	110 - 170
LO频率LO Frequency [GHz]	55 - 85
IF频率IF Frequency [GHz]	DC-18
LO驱动功率LO Input Power [dBm]	+10 Typ./+15 Max.
RF输入功率RF Input Power[dBm]	+10 Max.
RF接口RF Port	WR6.5(UG387/UM)
LO接口LO Port	WR13(UG387/UM)
IF接口IF Port	2.92mm-F
壳温Max. Case Temperature [°C]	+45

典型性能Typical Performance

Conversion Loss(SSB) vs Frequency

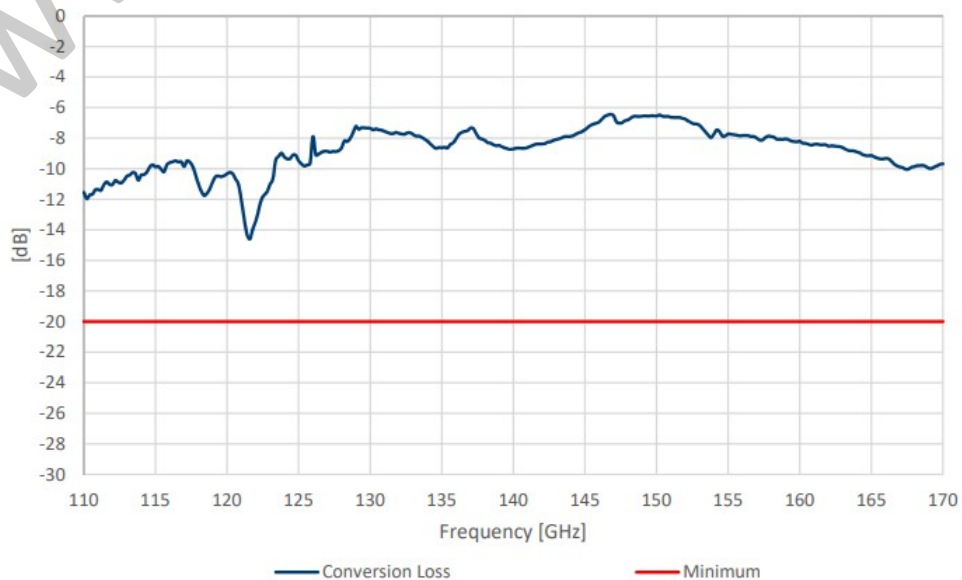

110-170 GHz Subharmonic Mixer
次谐波混频器

外形尺寸 Overall Dimension

