

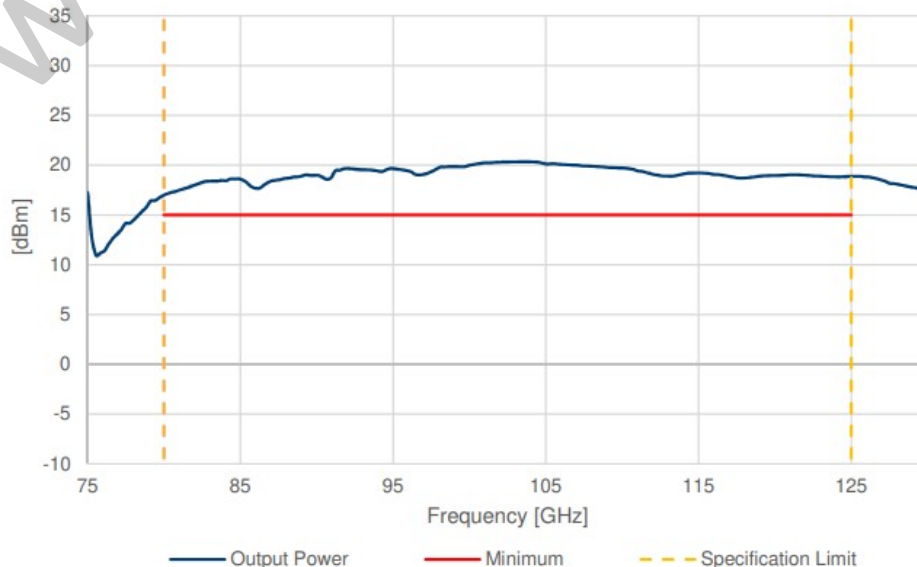
80-125 GHz Frequency Multiplier
倍频器
描述Description

The LMA-6006 is an active frequency multiplier which can output frequency of 80-120 GHz.

特点Feature

- Input Frequency: 13.33-20.83GHz
- Multiplication Factor: 6

产品规格Specifications	
输入频率Input Frequency [GHz]	13.33 - 20.83
输出频率Output Frequency [GHz]	80 - 125
倍频次数Multiplication Factor	6
输入功率Input Power [dBm]	+7 Typ./+10 Max.
输出功率Output Power [dBm]	+17 Typ.
输入连接器口RF Input Port	2.92mm-F
输出连接器口RF Output Port	WR9(UG387/UM)
偏置电压Input Voltage[V]	+5.8/-5.5V
偏置电流Supply Current[mA]	+2600 Typ.

典型性能Typical Performance
Output Power vs Frequency


80-125 GHz Frequency Multiplier

倍频器

外形尺寸 Overall Dimension

