

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY


REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LFC-5022

80 – 2500 MHz 混频器 Frequency Mixer

—电气技术参数 Electrical Specifications—

射频范围 RF Range:	80 – 2500MHz
本振范围 LO Range:	80 – 2500MHz
中频范围 IF Range:	1 – 1000MHz
LO-RF 隔离度 LO-RF Isolation:	37dB
LO-IF 隔离度 LO-IF Isolation:	33dB
RF-IF 隔离度 RF-IF Isolation:	/
变频损耗 Conversion Loss:	8dB
本振功率 LO Power:	17dBm
输入功率三阶截断点 IIP3:	30dBm
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-55 ~ +100°C

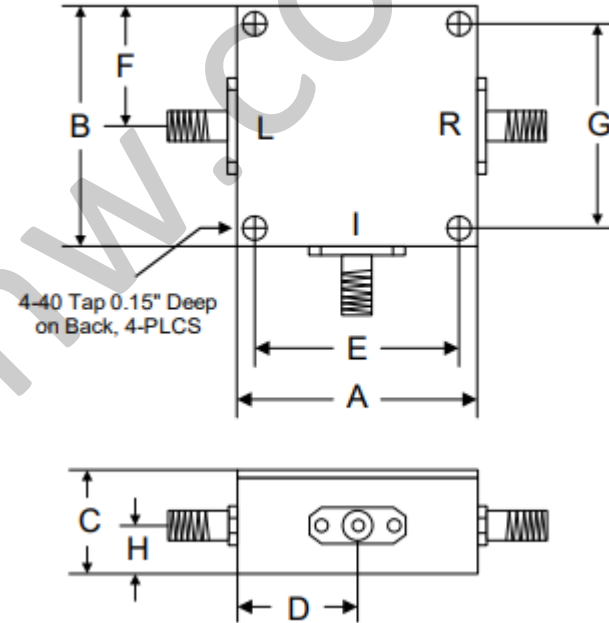

	A	B	C	D	E	F	G	H
Inch	1.250	1.250	0.563	0.625	1.000	0.625	1.000	0.250
mm	31.75	31.75	14.29	15.88	25.40	15.88	25.40	6.35

—机械技术参数 Mechanical Specifications—

RF 连接器 RF Interface:	SMA-F
LO 连接器 LO Interface:	SMA-F
IF 连接器 IF Interface:	SMA-F
尺寸 Size(excluding connectors) :	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012			莱尔微波 Laird Microwave www.lairmw.com sales@lairmw.com	P/N: LFC-5022	
	Approvals	DATE		80 – 2500 MHz 混频器 Frequency Mixer 本振功率 LO Power 17 dBm	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	SIZE A3		CAGE NO
		ENG	SCALE 3:2		DWG NO.
CHK	Q.A.	UNIT mm		REV 1	SHEET 1 OF 1