

140-220 GHz Subharmonic Mixer 次谐波混频器

描述Description

The LFC-6002 is a subharmonic mixer which operates between 140 and 220 GHz.

特点Feature


- Compact Package
- Low LO Power Requirement

产品规格Specifications

RF频率RF Frequency [GHz]	140 - 220
LO频率LO Frequency [GHz]	70 - 110
IF频率IF Frequency [GHz]	DC-18
LO驱动功率LO Input Power [dBm]	+10 Typ./+15 Max.
RF输入功率RF Input Power[dBm]	+10 Max.
RF接口RF Port	WR5.1(UG387/UM)
LO接口LO Port	WR10(UG387/UM)
IF接口IF Port	2.92mm-F
壳温Max. Case Temperature [°C]	+45

典型性能Typical Performance

Conversion Loss(SSB) vs Frequency

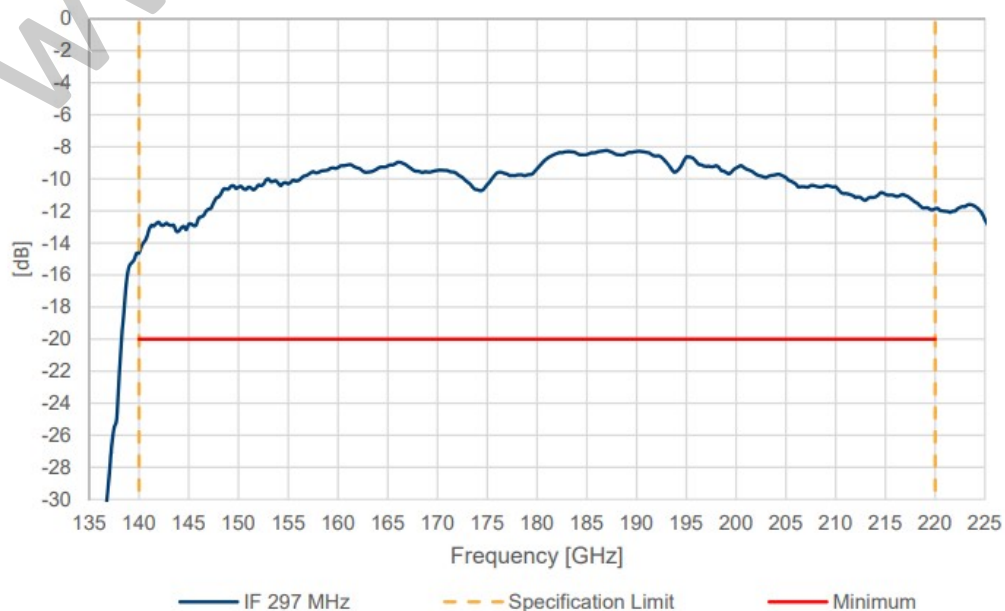

140-220 GHz Subharmonic Mixer
次谐波混频器

外形尺寸 Overall Dimension

