

45-75 GHz Frequency Multiplier

倍频器

描述Description

The LMA-6001 is an active frequency multiplier which can output frequency of 45-75 GHz.

特点Feature


- Input Frequency: 11.25-18.75GHz
- Multiplication Factor:4

产品规格Specifications

输入频率Input Frequency [GHz]	11.25 - 18.75
输出频率Output Frequency [GHz]	45 - 75
倍频次数Multiplication Factor	4
输入功率Input Power [dBm]	+7 Typ./+10 Max.
输出功率Output Power [dBm]	+12 Typ.
输入连接器口RF Input Port	2.92mm-F
输出连接器口RF Output Port	WR15(UG387/UM)
偏置电压Input Voltage[V]	+7
偏置电流Supply Current[mA]	+550 Typ.

典型性能Typical Performance

Output Power vs Frequency

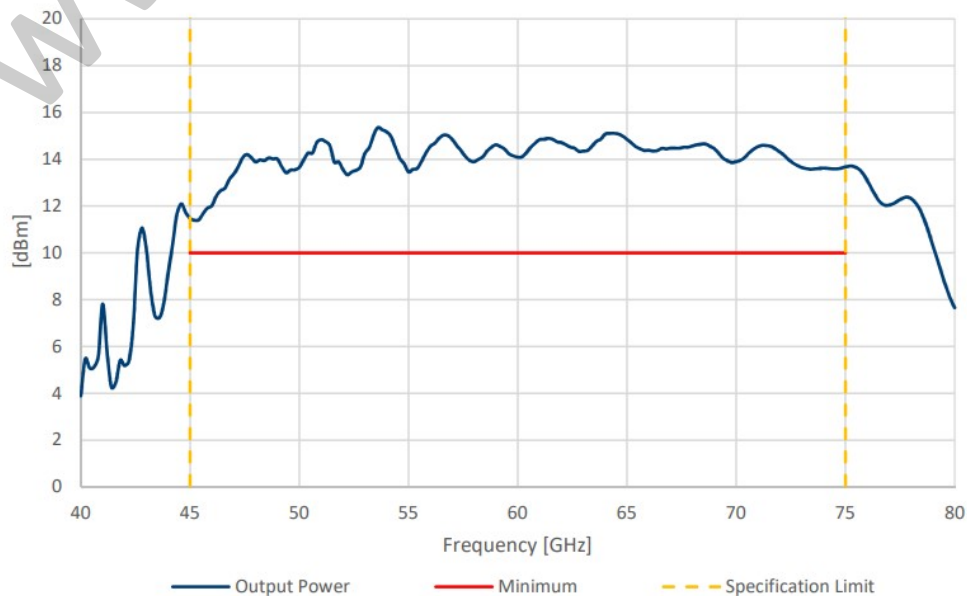

45-75 GHz Frequency Multiplier

倍频器

外形尺寸 Overall Dimension

