
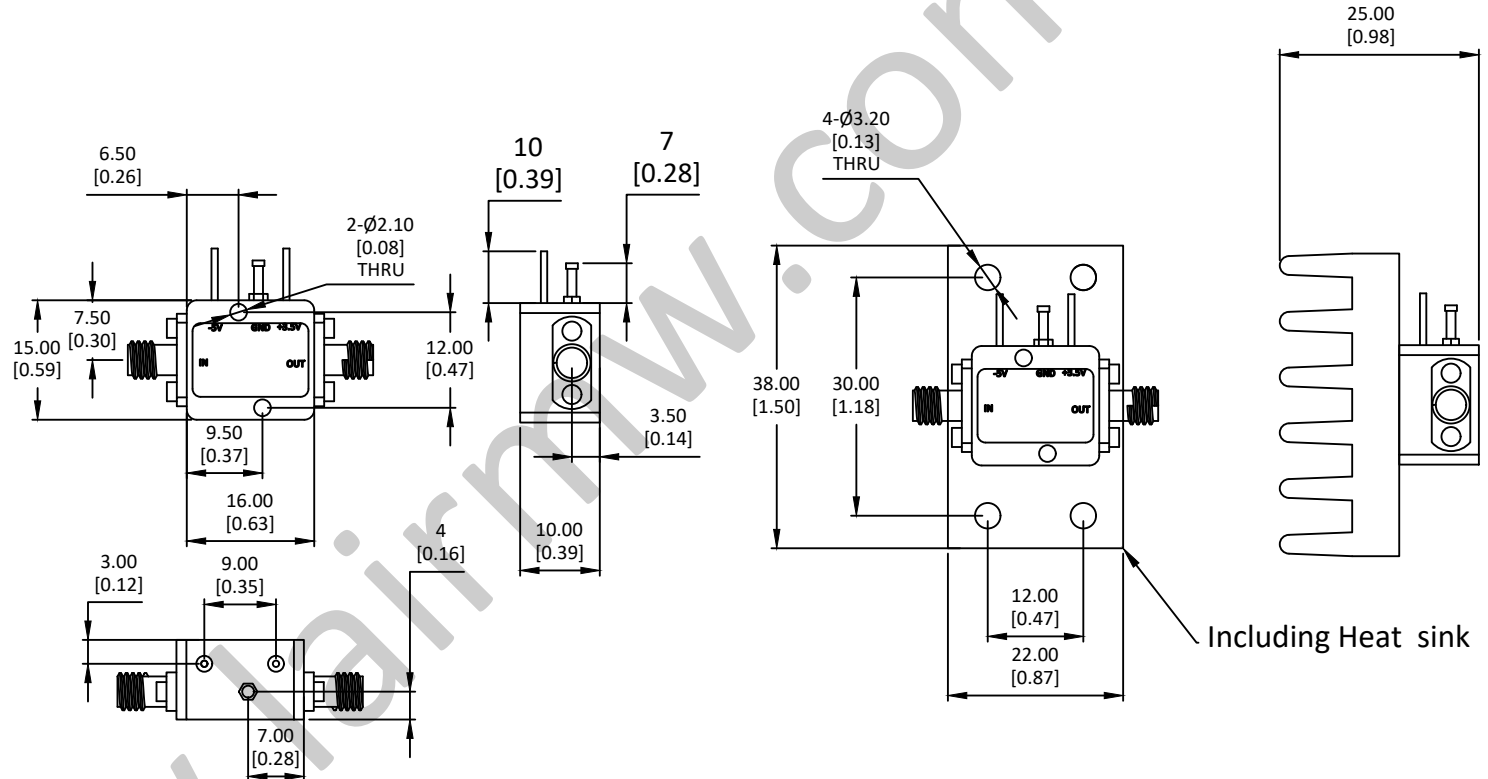


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			



LAL-1050

16~24GHz 低噪声放大器 Low Noise Amplifier


—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	16 - 24GHz
增益 Gain:	23dB
增益平坦度 Gain Flatness:	/
噪声系数 Noise Figure:	1.8dB
输出 P_{1dB} Output P_{1dB} :	18dBm
输入驻波比 Input VSWR:	2.0:1
输出驻波比 Output VSWR:	1.8:1
直流偏置电压 DC Supply Voltage:	+3.5/-5V
直流偏置电流 DC Supply Current:	100mA
工作温度 Operation Temperature:	-40~+85°C
存储温度 Storage Temperature:	-50~+105°C

—机械技术参数 Mechanical Specification—

输入连接器 Input Interface:	2.92mm-F
输出连接器 Output Interface:	2.92mm-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.XX±0.1 ±1° ±2/5
.XXX±0.03
.XXX±0.012



Approvals

DATE

DRWN

ENG

CHK

Q.A.



www.lairmw.com sales@lairmw.com

P/N: LAL-1050

16-24GHz 低噪声放大器 Low Noise Amplifier
增益 Gain 23dB, 噪声系数 NF 1.8dB

SIZE A3

SCALE 3:2

CAGE NO

UNIT mm

DWG NO.

SHEET 1 OF 1

REV 1

HOLE DIAMETER
.35 TO 3.20
3.21 TO 6.35
6.36 TO 12.70
12.71 TO 19.05
19.06 TO 25.40
25.41 TO 50.80

TOLERANCES
+.05/- .02
+.10/- .03
+.15/- .03
+.20/- .03
+.25/- .03
+.30/- .03