

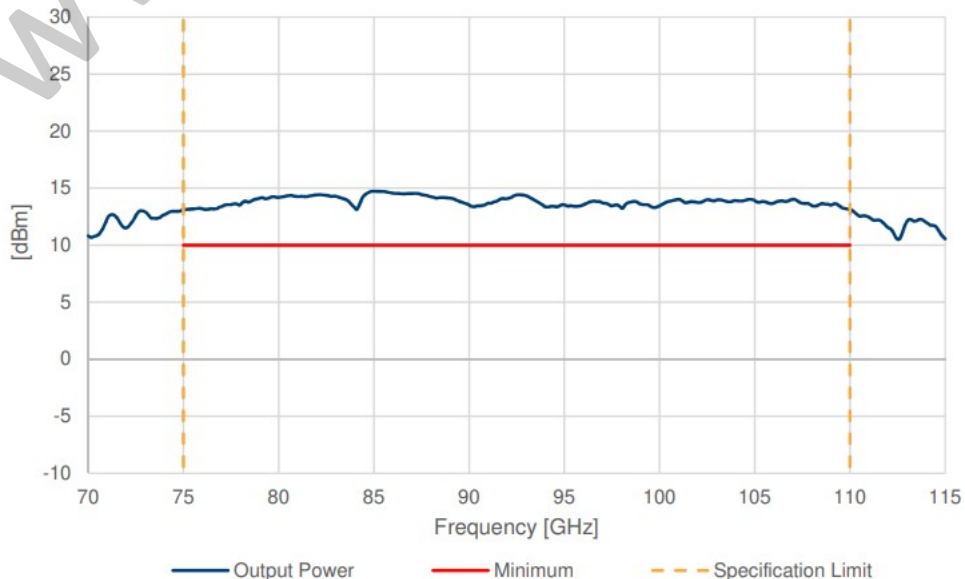
75-110 GHz Frequency Multiplier
倍频器
描述Description

The LMA-6003 is an active frequency multiplier which can output frequency of 75-110 GHz.

特点Feature

- Input Frequency: 12.5-18.33GHz
- Multiplication Factor:6

产品规格Specifications	
输入频率Input Frequency [GHz]	12.5 - 18.33
输出频率Output Frequency [GHz]	75 - 110
倍频次数Multiplication Factor	6
输入功率Input Power [dBm]	+7 Typ./+10 Max.
输出功率Output Power [dBm]	+10 Typ.
输入连接器口RF Input Port	2.92mm-F
输出连接器口RF Output Port	WR10(UG387/UM)
偏置电压Input Voltage[V]	+7
偏置电流Supply Current[mA]	+650 Typ.

典型性能Typical Performance
Output Power vs Frequency


75-110 GHz Frequency Multiplier
倍频器

外形尺寸 Overall Dimension

