

60-90 GHz Frequency Multiplier
倍频器
描述Description

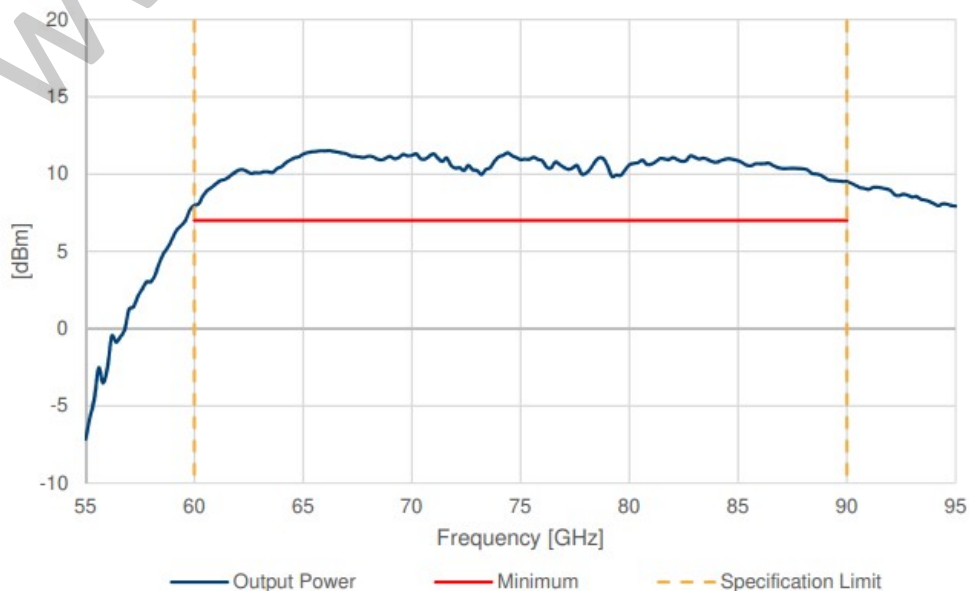
The LMA-6005 is an active frequency multiplier which can output frequency of 60-90 GHz.

特点Feature

- Input Frequency: 10-15GHz
- Multiplication Factor:6

产品规格Specifications

输入频率Input Frequency [GHz]	10 - 15
输出频率Output Frequency [GHz]	60 - 90
倍频次数Multiplication Factor	6
输入功率Input Power [dBm]	+7 Typ./+10 Max.
输出功率Output Power [dBm]	+10 Typ.
输入连接器口RF Input Port	2.92mm-F
输出连接器口RF Output Port	WR12(UG387/UM)
偏置电压Input Voltage[V]	+7
偏置电流Supply Current[mA]	+650 Typ.

典型性能Typical Performance
Output Power vs Frequency


60-90 GHz Frequency Multiplier

倍频器

外形尺寸 Overall Dimension

