
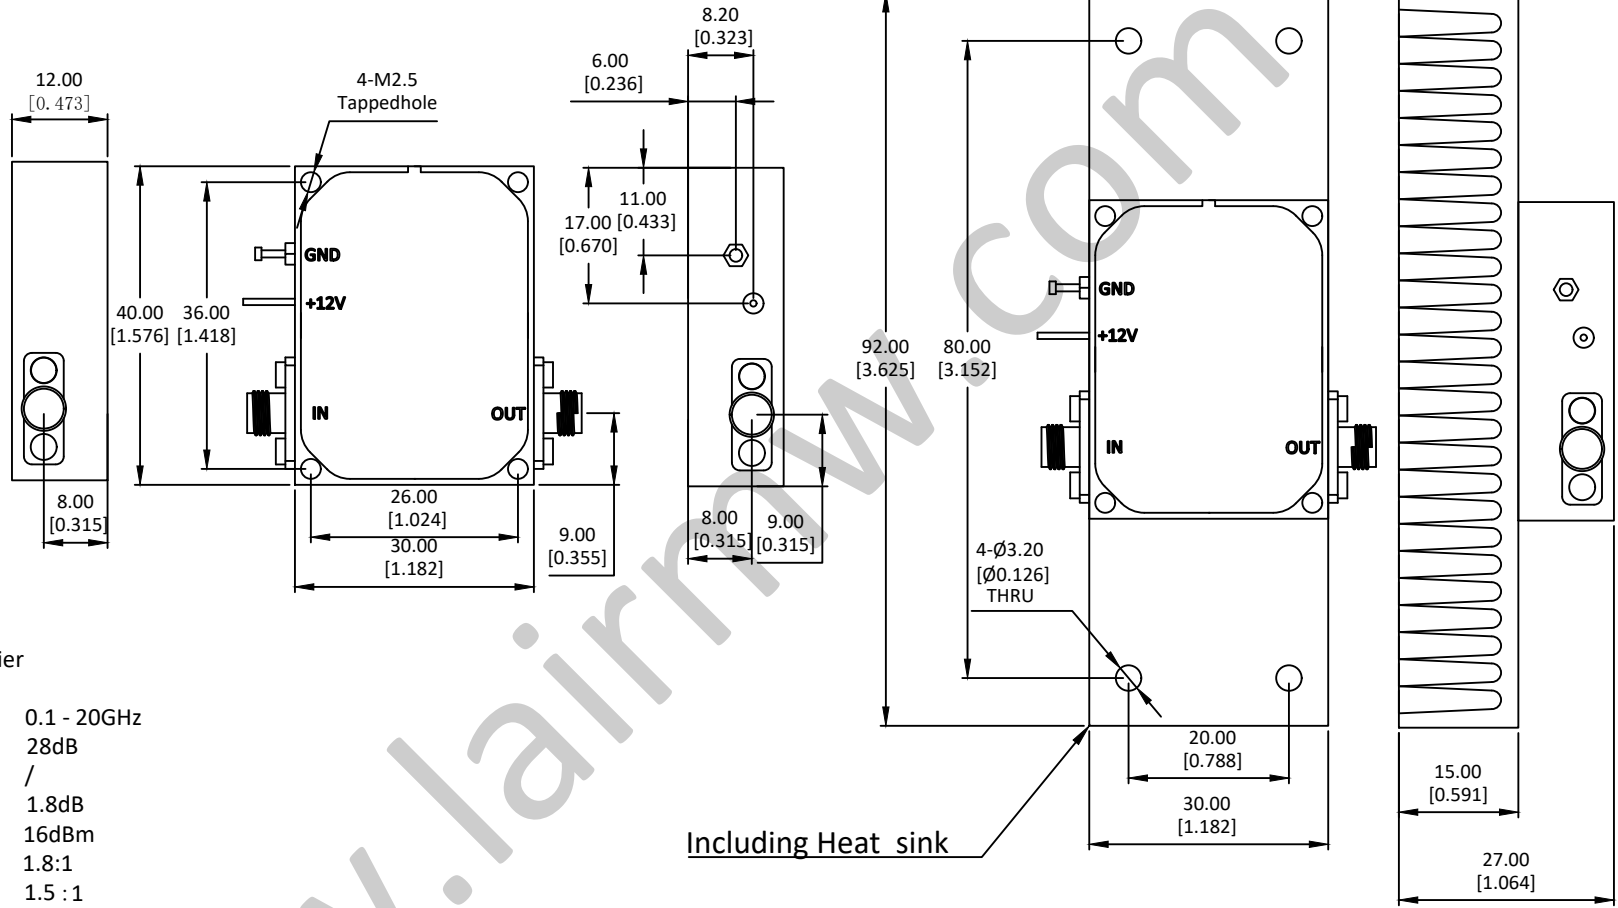


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

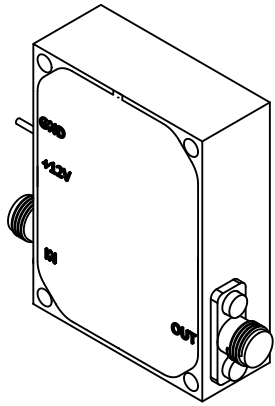

LAL-1168

0.1~20GHz 低噪声放大器 Low Noise Amplifier

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	0.1 - 20GHz
增益 Gain:	28dB
增益平坦度 Gain Flatness:	/
噪声系数 Noise Figure:	1.8dB
输出 P _{1dB} Output P _{1dB} :	16dBm
输入驻波比 Input VSWR:	1.8:1
输出驻波比 Output VSWR:	1.5 : 1
直流偏置电压 DC Supply Voltage:	+12V
直流偏置电流 DC Supply Current:	210mA
工作温度 Operation Temperature:	-40~+85℃
存储温度 Storage Temperature:	-50~+105℃

—机械技术参数 Mechanical Specification—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size(excluding connectors):	/
重量 Weight:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012						P/N: LAL-1168																			
<table border="1"> <tr> <td>Approvals</td> <td>DATE</td> </tr> <tr> <td>DRWN</td> <td></td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		Approvals	DATE	DRWN		ENG		CHK		Q.A.		<table border="1"> <tr> <td colspan="2">0.1-20GHz 低噪声放大器 Low Noise Amplifier 增益 Gain 28dB, 噪声系数 NF 1.8dB</td> </tr> <tr> <td>SIZE</td> <td>REV</td> </tr> <tr> <td>A3</td> <td>1</td> </tr> </table>		0.1-20GHz 低噪声放大器 Low Noise Amplifier 增益 Gain 28dB, 噪声系数 NF 1.8dB		SIZE	REV	A3	1	<table border="1"> <tr> <td>CAGE NO.</td> <td>DWG NO.</td> </tr> <tr> <td></td> <td></td> </tr> </table>		CAGE NO.	DWG NO.		
Approvals	DATE																								
DRWN																									
ENG																									
CHK																									
Q.A.																									
0.1-20GHz 低噪声放大器 Low Noise Amplifier 增益 Gain 28dB, 噪声系数 NF 1.8dB																									
SIZE	REV																								
A3	1																								
CAGE NO.	DWG NO.																								
<table border="1"> <tr> <td>HOLE DIAMETER</td> <td>TOLERANCES</td> </tr> <tr> <td>.35 TO 3.20</td> <td>+.05/- .02</td> </tr> <tr> <td>3.21 TO 6.35</td> <td>+.10/- .03</td> </tr> <tr> <td>6.36 TO 12.70</td> <td>+.15/- .03</td> </tr> <tr> <td>12.71 TO 19.05</td> <td>+.20/- .03</td> </tr> <tr> <td>19.06 TO 25.40</td> <td>+.25/- .03</td> </tr> <tr> <td>25.41 TO 50.80</td> <td>+.30/- .03</td> </tr> </table>		HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+.05/- .02	3.21 TO 6.35	+.10/- .03	6.36 TO 12.70	+.15/- .03	12.71 TO 19.05	+.20/- .03	19.06 TO 25.40	+.25/- .03	25.41 TO 50.80	+.30/- .03	<table border="1"> <tr> <td>SCALE</td> <td>UNIT</td> </tr> <tr> <td>3:2</td> <td>mm</td> </tr> </table>		SCALE	UNIT	3:2	mm	<table border="1"> <tr> <td colspan="2">SHEET 1 OF 1</td> </tr> </table>		SHEET 1 OF 1	
HOLE DIAMETER	TOLERANCES																								
.35 TO 3.20	+.05/- .02																								
3.21 TO 6.35	+.10/- .03																								
6.36 TO 12.70	+.15/- .03																								
12.71 TO 19.05	+.20/- .03																								
19.06 TO 25.40	+.25/- .03																								
25.41 TO 50.80	+.30/- .03																								
SCALE	UNIT																								
3:2	mm																								
SHEET 1 OF 1																									