
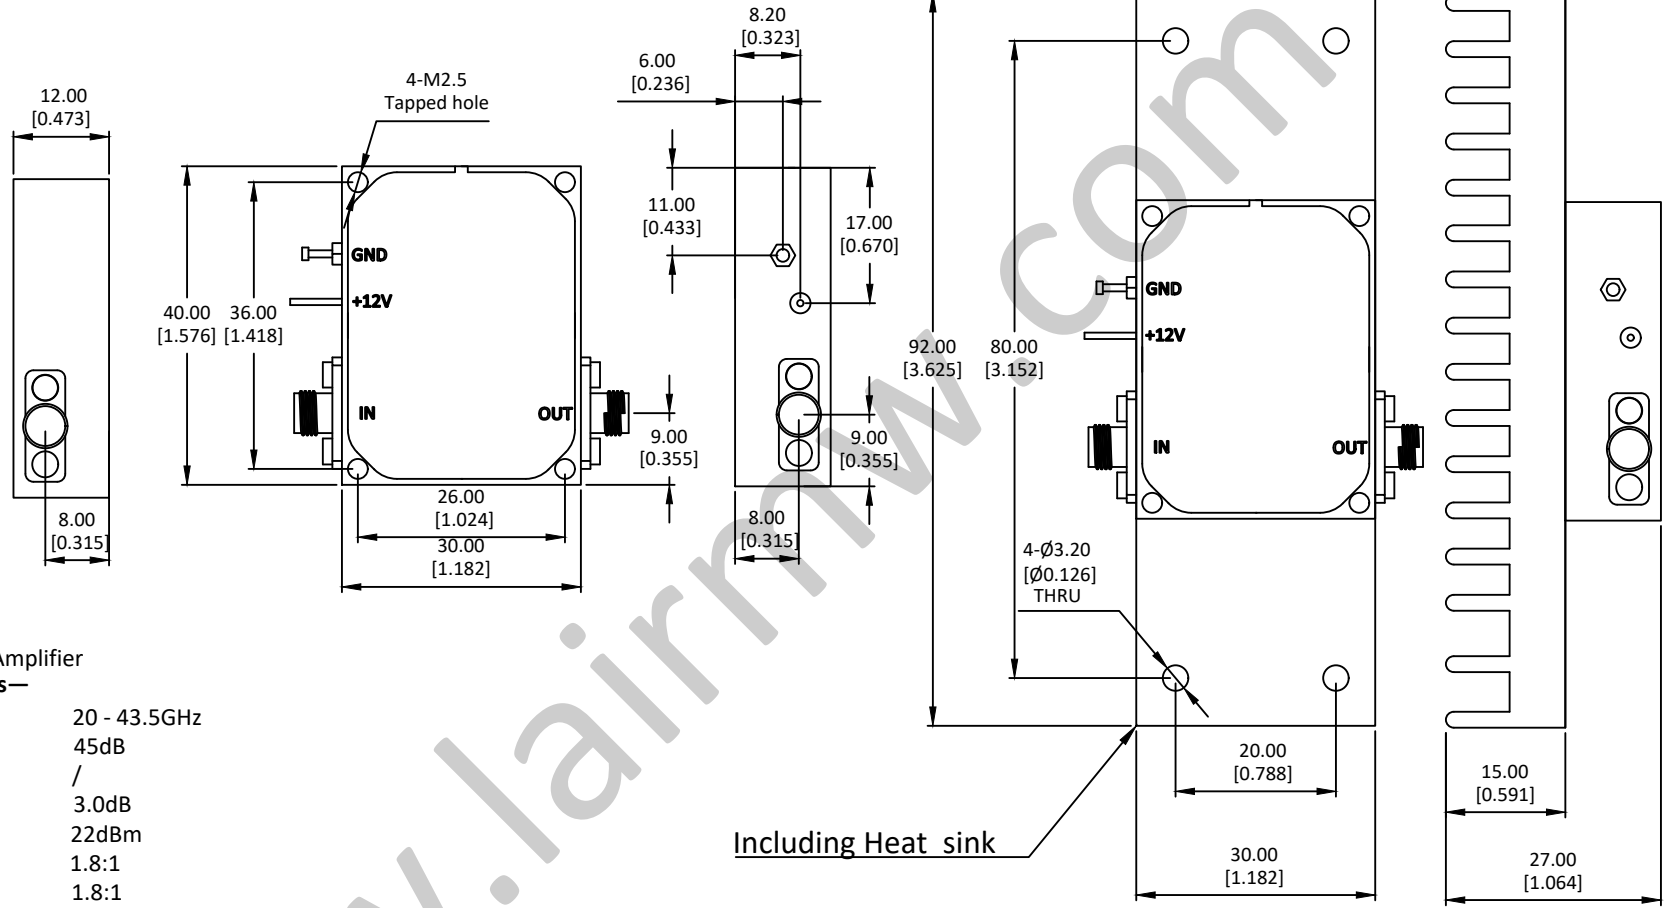


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

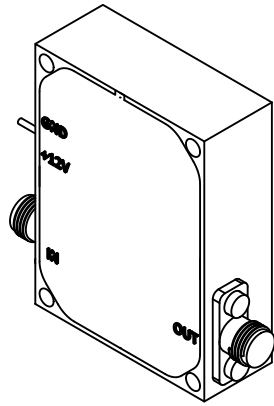

## LAL-1252

20~43.5GHz 低噪声放大器 Low Noise Amplifier

### —电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	20 - 43.5GHz
增益 Gain:	45dB
增益平坦度 Gain Flatness:	/
噪声系数 Noise Figure:	3.0dB
输出 P <sub>1dB</sub> Output P <sub>1dB</sub> :	22dBm
输入驻波比 Input VSWR:	1.8:1
输出驻波比 Output VSWR:	1.8:1
直流偏置电压 DC Supply Voltage:	+12V
直流偏置电流 DC Supply Current:	280mA
工作温度 Operation Temperature:	-40~+85℃
存储温度 Storage Temperature:	-50~+105℃

### —机械技术参数 Mechanical Specification—

输入连接器 Input Interface:	2.92mm-F
输出连接器 Output Interface:	2.92mm-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

Including Heat sink

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LAL-1252																													
<table border="1"> <tr><td>Approvals</td><td>DATE</td></tr> <tr><td>DRWN</td><td></td></tr> <tr><td>ENG</td><td></td></tr> <tr><td>CHK</td><td></td></tr> <tr><td>Q.A.</td><td></td></tr> </table>		Approvals	DATE	DRWN		ENG		CHK		Q.A.		<table border="1"> <tr><td>DRWN</td><td></td></tr> <tr><td>ENG</td><td></td></tr> <tr><td>CHK</td><td></td></tr> <tr><td>Q.A.</td><td></td></tr> </table>		DRWN		ENG		CHK		Q.A.		20-43.5GHz 低噪声放大器 Low Noise Amplifier 增益 Gain 45dB, 噪声系数 NF 3.0dB													
Approvals	DATE																																		
DRWN																																			
ENG																																			
CHK																																			
Q.A.																																			
DRWN																																			
ENG																																			
CHK																																			
Q.A.																																			
<table border="1"> <tr><td>HOLE DIAMETER</td><td>TOLERANCES</td></tr> <tr><td>.35 TO 3.20</td><td>+.05/- .02</td></tr> <tr><td>3.21 TO 6.35</td><td>+.10/- .03</td></tr> <tr><td>6.36 TO 12.70</td><td>+.15/- .03</td></tr> <tr><td>12.71 TO 19.05</td><td>+.20/- .03</td></tr> <tr><td>19.06 TO 25.40</td><td>+.25/- .03</td></tr> <tr><td>25.41 TO 50.80</td><td>+.30/- .03</td></tr> </table>		HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+.05/- .02	3.21 TO 6.35	+.10/- .03	6.36 TO 12.70	+.15/- .03	12.71 TO 19.05	+.20/- .03	19.06 TO 25.40	+.25/- .03	25.41 TO 50.80	+.30/- .03	<table border="1"> <tr><td>SIZE</td><td>CAGE NO</td><td>DWG NO.</td><td>REV</td></tr> <tr><td>A3</td><td></td><td></td><td>1</td></tr> </table>		SIZE	CAGE NO	DWG NO.	REV	A3			1	<table border="1"> <tr><td>SCALE</td><td>UNIT</td><td colspan="2">SHEET 1 OF 1</td></tr> <tr><td>3:2</td><td>mm</td><td colspan="2"></td></tr> </table>		SCALE	UNIT	SHEET 1 OF 1		3:2	mm		
HOLE DIAMETER	TOLERANCES																																		
.35 TO 3.20	+.05/- .02																																		
3.21 TO 6.35	+.10/- .03																																		
6.36 TO 12.70	+.15/- .03																																		
12.71 TO 19.05	+.20/- .03																																		
19.06 TO 25.40	+.25/- .03																																		
25.41 TO 50.80	+.30/- .03																																		
SIZE	CAGE NO	DWG NO.	REV																																
A3			1																																
SCALE	UNIT	SHEET 1 OF 1																																	
3:2	mm																																		