
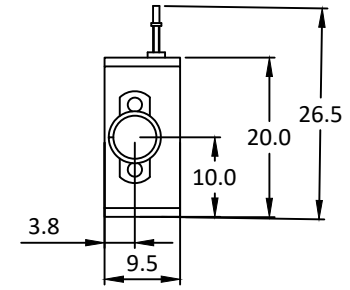
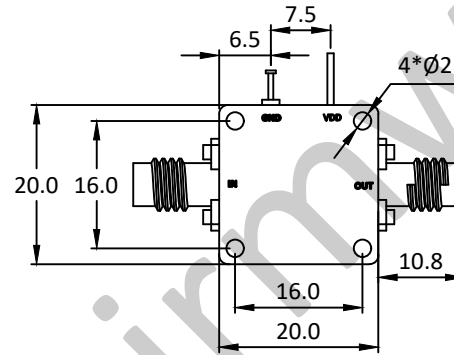


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			



LAL-3015

2 - 6GHz 低噪声放大器 Low Noise Amplifier


—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	2 - 6GHz
增益 Gain:	25dB
增益平坦度 Gain Flatness:	±0.7dB
噪声系数 Noise Figure:	1.0dB
输出 P _{1dB} Output P _{1dB} :	10dBm
输入驻波比 Input VSWR:	10dB
输出驻波比 Output VSWR:	10dB
直流偏置电压 DC Supply Voltage:	+5V
直流偏置电流 DC Supply Current:	50mA
工作温度 Operation Temperature:	-40~+85℃
存储温度 Storage Temperature:	-55~+125℃

—机械技术参数 Mechanical Specification—

输入连接器 Input Interface:	SMA-F
输出连接器 Out Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.XX±0.1 ±1° ±2/5
.XXX±0.03
XXX±0.012



Approvals	DATE
DRWN	
ENG	
CHK	
Q.A.	



www.lairmw.com sales@lairmw.com

P/N: LAL-3015

2-6GHz 低噪声放大器 Low Noise Amplifier
增益 Gain 25dB, 噪声系数 NF 1.0dB

SIZE	A3	CAGE NO	DWG NO.	REV	1
SCALE	3:2	UNIT	mm	SHEET 1 OF 1	