
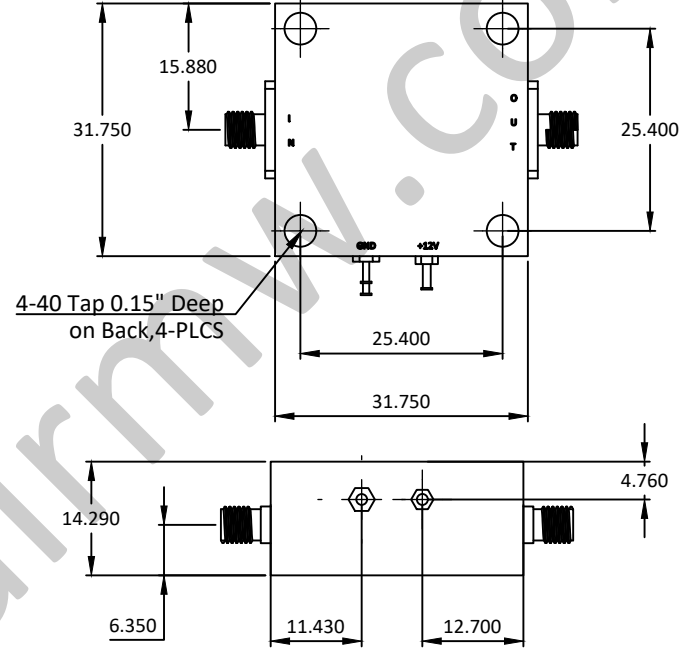


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

| REVISION HISTORY | | | | | |
|------------------|-----|---------------------|----------|------|----------|
| ZONE | REV | DESCRIPTION | E.C.O.NO | DATE | APPROVED |
| | 1 | ENGINEERING RELEASE | | | |

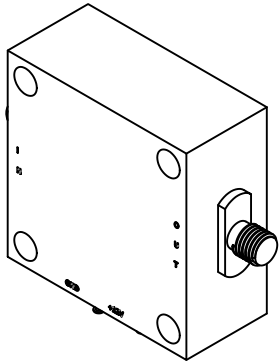

LAL-5002

0.1 - 1.4GHz 低噪声放大器 Low Noise Amplifier


—电气技术参数 Electrical Specifications—

| | |
|---|--------------|
| 频率范围 Frequency Range: | 0.1 - 1.4GHz |
| 增益 Gain: | 20dB |
| 增益平坦度 Gain Flatness: | / |
| 噪声系数 Noise Figure: | 0.8dB |
| 输出 P _{1dB} Output P _{1dB} : | 17dBm |
| 输入驻波比 Input VSWR: | 1.25:1 |
| 输出驻波比 Output VSWR: | 1.35:1 |
| 直流偏置电压 DC Supply Voltage: | +7 ~ +15V |
| 直流偏置电流 DC Supply Current: | 75mA |
| 工作温度 Operation Temperature: | -40 ~ +85°C |
| 存储温度 Storage Temperature: | -55 ~ +125°C |

—机械技术参数 Mechanical Specification—

| | |
|---------------------------------|-------|
| 输入连接器 Input Interface: | SMA-F |
| 输出连接器 Output Interface: | SMA-F |
| 尺寸 Size (excluding connectors): | / |
| 重量 Weight: | / |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.XX±0.1 ±1' ±2/5
.XXX±0.012



| Approvals | DATE |
|-----------|------|
| DRWN | |
| ENG | |
| CHK | |
| Q.A. | |



P/N: LAL-5002

0.1-1.4GHz 低噪声放大器 Low Noise Amplifier
增益 Gain 20dB, 噪声系数 NF 0.8dB

| SIZE | CAGE NO | DWG NO. | REV |
|-------|---------|--------------|-----|
| A3 | | | 1 |
| SCALE | UNIT | SHEET 1 OF 1 | |
| 3:2 | mm | | |

| HOLE DIAMETER | TOLERANCES |
|----------------|-------------|
| .35 TO 3.20 | +0.05/-0.02 |
| 3.21 TO 6.35 | +0.10/-0.03 |
| 6.36 TO 12.70 | +0.15/-0.03 |
| 12.71 TO 19.05 | +0.20/-0.03 |
| 19.06 TO 25.40 | +0.25/-0.03 |
| 25.41 TO 50.80 | +0.30/-0.03 |