
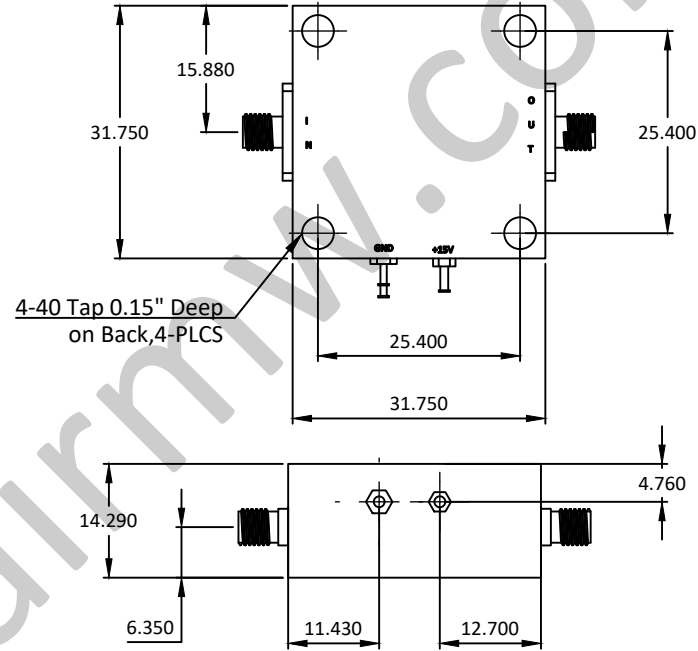


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

| REVISION HISTORY | | | | | |
|------------------|-----|---------------------|----------|------|----------|
| ZONE | REV | DESCRIPTION | E.C.O.NO | DATE | APPROVED |
| | 1 | ENGINEERING RELEASE | | | |

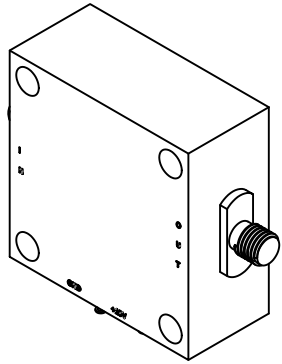

LAL-5093

10KHz - 1.4GHz 低噪声放大器 Low Noise Amplifier

—电气技术参数 Electrical Specifications—


| | |
|---|---------------|
| 频率范围 Frequency Range: | 10KHz- 1.4GHz |
| 增益 Gain: | 40dB |
| 增益平坦度 Gain Flatness: | ±1.0dB |
| 噪声系数 Noise Figure: | 3.0dB |
| 输出 P _{1dB} Output P _{1dB} : | 19dBm |
| 输入驻波比 Input VSWR: | 1.4:1 |
| 输出驻波比 Output VSWR: | 1.5:1 |
| 直流偏置电压 DC Supply Voltage: | +15V |
| 直流偏置电流 DC Supply Current: | 120mA |
| 工作温度 Operation Temperature: | -40 ~ +85°C |
| 存储温度 Storage Temperature: | -55 ~ +125°C |

—机械技术参数 Mechanical Specification—

| | |
|--------------------------------|-------|
| 输入连接器 Input Interface: | SMA-F |
| 输出连接器 Output Interface: | SMA-F |
| 尺寸 Size(excluding connectors): | / |
| 重量 Weight: | / |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.XX±0.1 ±1° ±2/5
.XXX±0.012

| HOLE DIAMETER | TOLERANCES |
|----------------|------------|
| .35 TO 3.20 | +05/-02 |
| 3.21 TO 6.35 | +10/-03 |
| 6.36 TO 12.70 | +15/-03 |
| 12.71 TO 19.05 | +20/-03 |
| 19.06 TO 25.40 | +25/-03 |
| 25.41 TO 50.80 | +30/-03 |



| Approvals | DATE |
|-----------|------|
| DRWN | |
| ENG | |
| CHK | |
| Q.A. | |



www.lairmw.com sales@lairmw.com

P/N: LAL-5093

10KHz-1.4GHz 低噪声放大器 Low Noise Amplifier
增益 Gain 40dB, 噪声系数 NF 3.0dB

| SIZE | CAGE NO | DWG NO. | REV |
|-----------|---------|--------------|-----|
| A3 | | | 1 |
| SCALE 3:2 | UNIT mm | SHEET 1 OF 1 | |