

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LAP-1051


25 – 40 GHz 功率放大器 Power Amplifier

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	25 – 40 GHz
增益 Gain:	54dB
输出 P _{1dB} Output P _{1dB} :	/
饱和输出功率 Psat:	34.5dBm
输入驻波比 Input VSWR:	1.4:1
输出驻波比 Output VSWR:	/
直流偏置电压 DC Power Supply:	+12V
直流偏置电流 DC Current Supply:	2100mA
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-50 ~ +105°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	2.92mm-F
输出连接器 Output Interface:	2.92mm-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

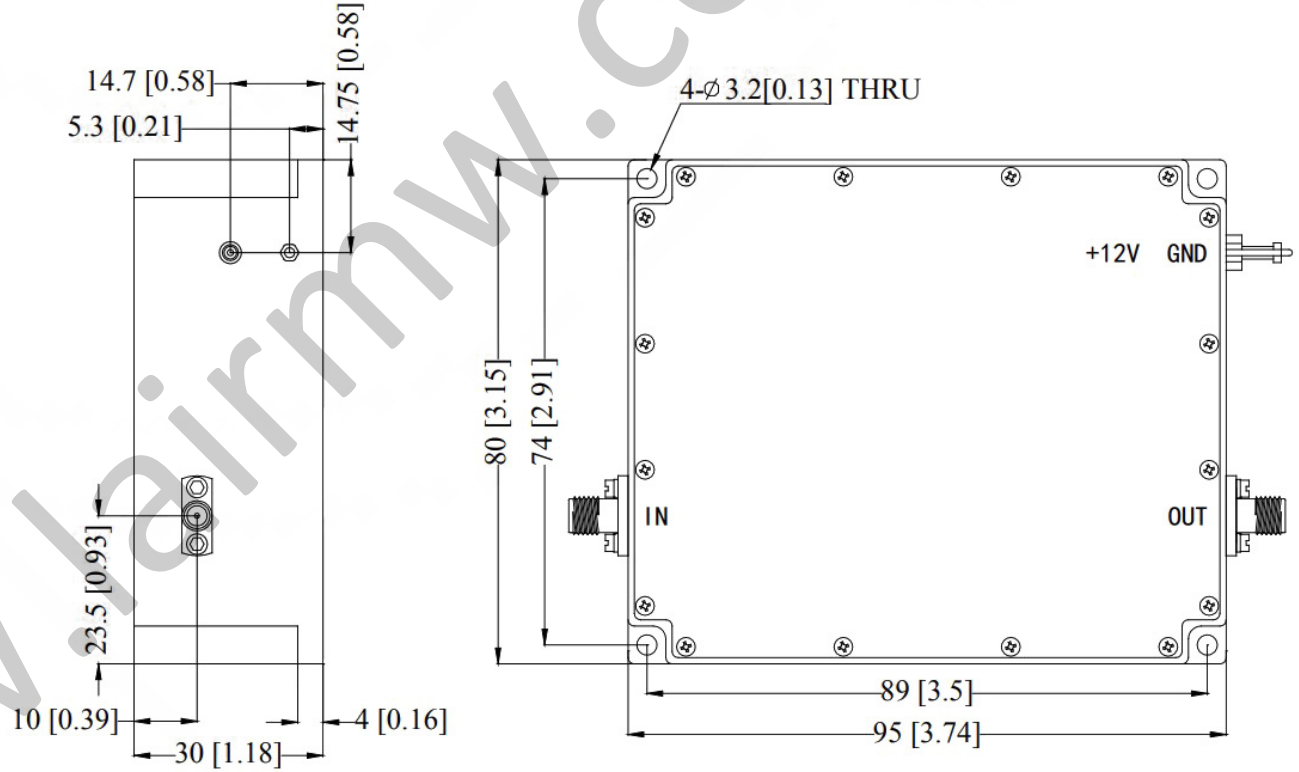

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			莱尔微波 Laird Microwave www.lairmw.com sales@lairmw.com	P/N: LAP-1051																				
	<table border="1"> <tr> <th>Approvals</th> <th>DATE</th> </tr> <tr> <td>DRWN</td> <td></td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>	Approvals		DATE	DRWN		ENG		CHK		Q.A.		25 - 40GHz 功率放大器 Power Amplifier 增益 Gain 54dB		<table border="1"> <tr> <th>SIZE</th> <th>CAGE NO</th> <th>DWG NO.</th> <th>REV</th> </tr> <tr> <td>A3</td> <td></td> <td></td> <td>1</td> </tr> </table>		SIZE	CAGE NO	DWG NO.	REV	A3			1
Approvals	DATE																							
DRWN																								
ENG																								
CHK																								
Q.A.																								
SIZE	CAGE NO	DWG NO.	REV																					
A3			1																					
<table border="1"> <tr> <th>HOLE DIAMETER</th> <th>TOLERANCES</th> </tr> <tr> <td>.35 TO 3.20</td> <td>+.05/- .02</td> </tr> <tr> <td>3.21 TO 6.35</td> <td>+.10/- .03</td> </tr> <tr> <td>6.36 TO 12.70</td> <td>+.15/- .03</td> </tr> <tr> <td>12.71 TO 19.05</td> <td>+.20/- .03</td> </tr> <tr> <td>19.06 TO 25.40</td> <td>+.25/- .03</td> </tr> <tr> <td>25.41 TO 50.80</td> <td>+.30/- .03</td> </tr> </table>	HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+.05/- .02	3.21 TO 6.35	+.10/- .03	6.36 TO 12.70	+.15/- .03	12.71 TO 19.05	+.20/- .03	19.06 TO 25.40	+.25/- .03	25.41 TO 50.80	+.30/- .03	<table border="1"> <tr> <th>SCALE</th> <th>UNIT</th> <th>SHEET</th> </tr> <tr> <td>3:2</td> <td>mm</td> <td>1 OF 1</td> </tr> </table>		SCALE	UNIT	SHEET	3:2	mm	1 OF 1		
HOLE DIAMETER	TOLERANCES																							
.35 TO 3.20	+.05/- .02																							
3.21 TO 6.35	+.10/- .03																							
6.36 TO 12.70	+.15/- .03																							
12.71 TO 19.05	+.20/- .03																							
19.06 TO 25.40	+.25/- .03																							
25.41 TO 50.80	+.30/- .03																							
SCALE	UNIT	SHEET																						
3:2	mm	1 OF 1																						