

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LAP-5076

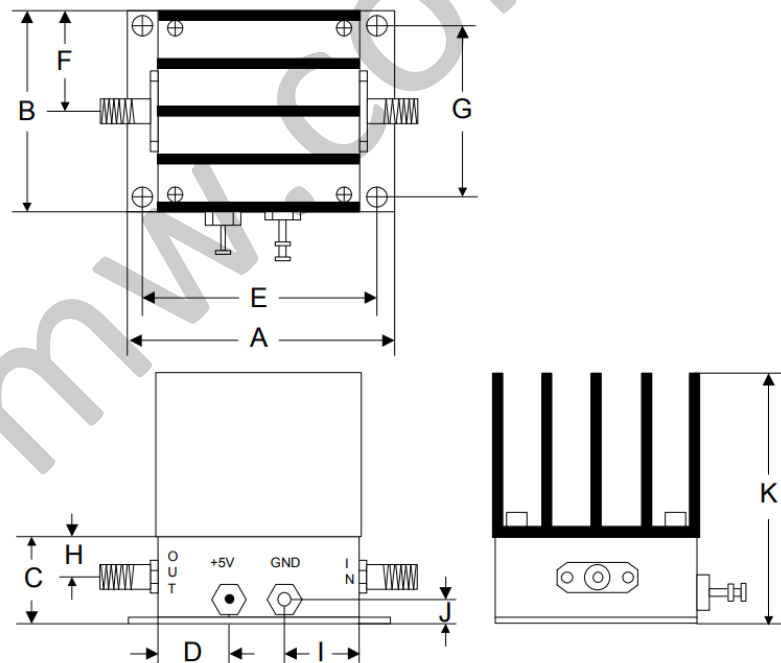
1.5 – 1.7 GHz 功率放大器 Power Amplifier

—电气技术参数 Electrical Specifications—



频率范围 Frequency Range:	1.5 – 1.7 GHz
增益 Gain:	12dB
输出 P _{1dB} Output P _{1dB} :	+30dBm
输出功率三阶截断点 OIP3:	+43.5dBm
输入驻波比 Input VSWR:	1.4:1
输出驻波比 Output VSWR:	1.4:1
直流偏置电压 DC Supply Voltage:	+5 V
直流偏置电流 DC Supply Current:	750mA
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-55 ~ +100°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/



	A	B	C	D	E	F	G	H	I	J	K
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187	1.563
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76	39.70

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012				P/N: LAP-5076		
		www.lairmw.com sales@lairmw.com				
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80 TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03	Approvals	DATE	1.5 - 1.7GHz 功率放大器 Power Amplifier 增益 Gain 12dB			
	DRWN		SIZE	CAGE NO	DWG NO.	REV
	ENG		A3			1
	CHK		SCALE	UNIT	SHEET 1 OF 1	
	Q.A.		3:2	mm		