
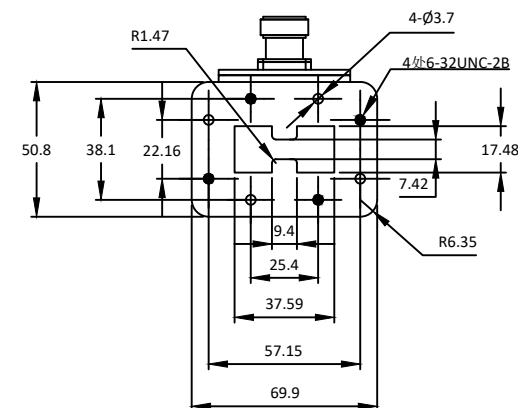


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

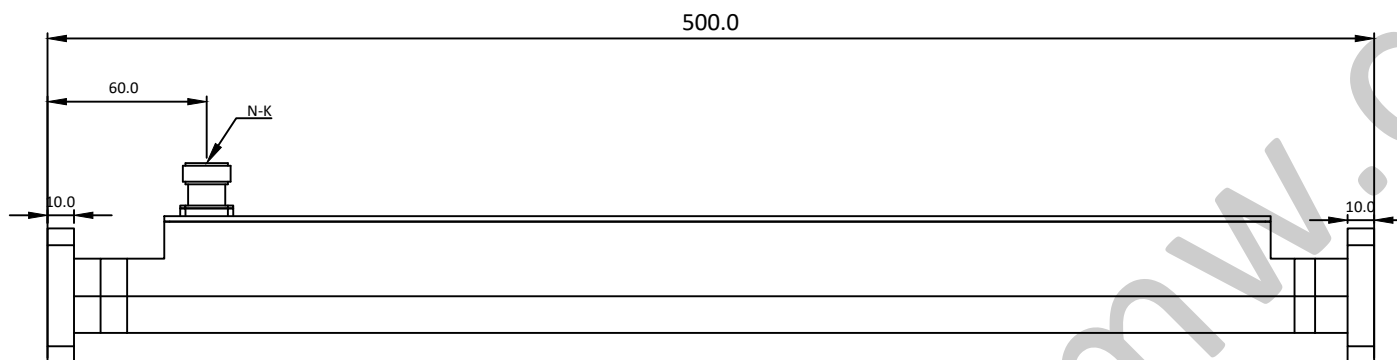

## LBC-0009

### 4 - 8GHz 波导耦合器 Waveguide Coupler

#### —电气技术参数 Electrical Specifications—

工作频率 Frequency Range:	4 - 8GHz
耦合度 Coupling:	40±2dB
方向性 Directivity:	≥30dB
主路驻波 Primary VSWR:	≤1.15
副路驻波 Secondary VSWR:	≤1.35
平均功率 CW:	≥6000W
插入损耗 Insertion Loss:	≤0.2dB
工作温度 Operation Temperature:	/

#### —机械技术参数 Mechanical Specification—

接口 Connectors:	/
法兰 Flange:	FPWRD350

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			 www.lairmw.com sales@lairmw.com	P/N: LBC-0009	
	Approvals	DATE		波导耦合器 WAVEGUIDE COUPLER	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +05/-02 +10/-03 +15/-03 +20/-03 +25/-03 +30/-03	DRWN	SIZE A3	CAGE NO	DWG NO.
		ENG	SCALE 3:2	UNIT mm	REV 1
		CHK	SHEET 1 OF 1		
		Q.A.			