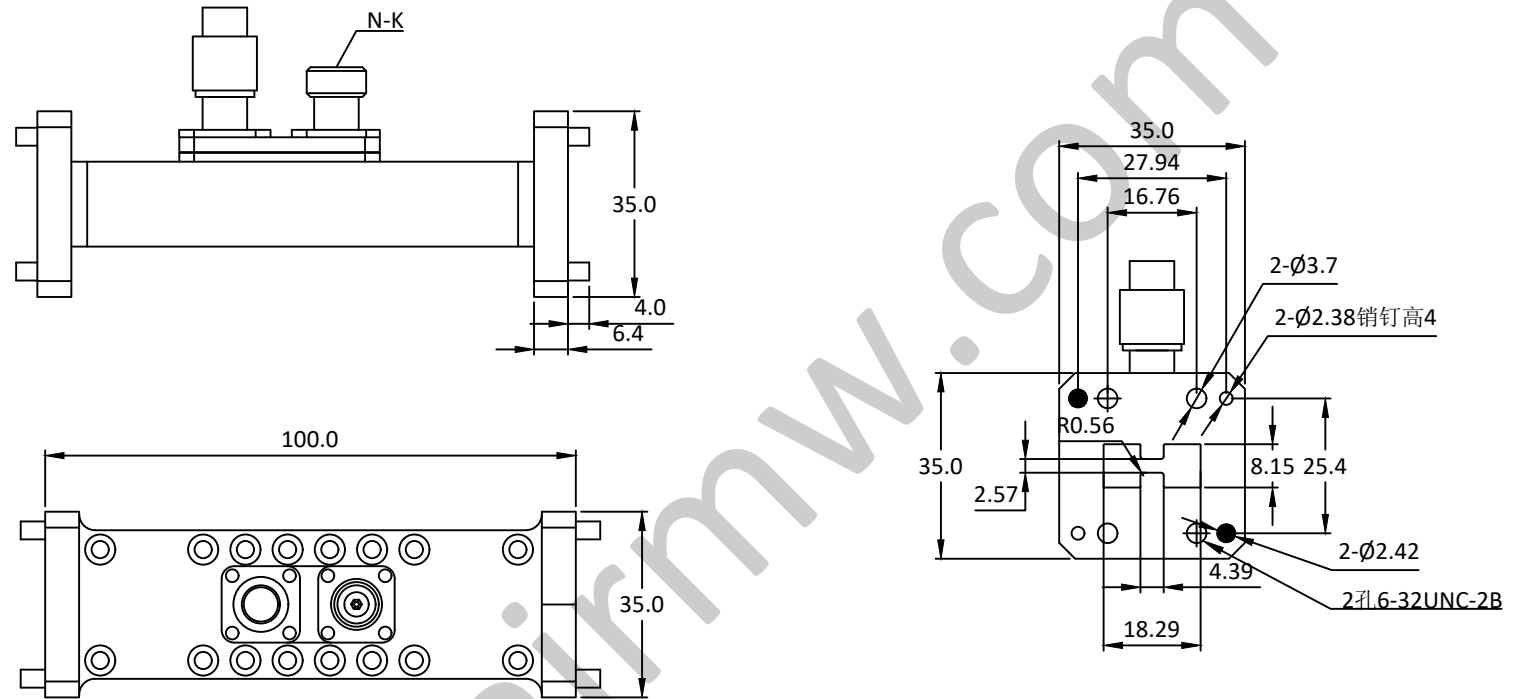


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			



LBC-0012



6.5 - 18GHz 波导耦合器 Waveguide Coupler

—电气技术参数 Electrical Specifications—

工作频率 Frequency Range:	6.5 - 18GHz
耦合度 Coupling:	40±2dB
方向性 Directivity:	≥15dB
主路驻波 Primary VSWR:	≤1.2
副路驻波 Secondary VSWR:	≤1.5
平均功率 CW:	/
工作温度 Operation Temperature:	/

—机械技术参数 Mechanical Specification—

接口 Connectors:	/
法兰 Flange:	FPWRD650

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 .XXX±0.012		 Approvals DATE		 www.lairmw.com sales@lairmw.com		P/N: LBC-0012	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/-0.2 +.10/-0.3 +.15/-0.3 +.20/-0.3 +.25/-0.3 +.30/-0.3		DRWN ENG CHK Q.A.		波导耦合器 WAVEGUIDE COUPLER	
		SIZE A3		CAGE NO		DWG NO.	
		SCALE 3:2		UNIT mm		REV 1	
				SHEET 1 OF 1			