

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LBF-1001


1500 - 1700 MHz介质带通滤波器 Band Pass Filter

—电气技术参数 Electrical Specifications—

通带频率 Pass Band Frequency:	1500 – 1700MHz
通带插损 Pass Band Insertion Loss:	2.0dB(Max.)
带内波动In-band Fluctuation:	1.0dB(Max.)
带外抑制 Rejection:	50dBc@DC-1.3GHz 50dBc@1.9-2.5GHz(Min.)
驻波比 VSWR:	1.5:1 (Max.)
工作温度 Operation Temperature:	-55 ~ +85°C
存储温度 Storage Temperature:	-40 ~ +70°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-K
输出连接器 Output Interface:	SMA-K

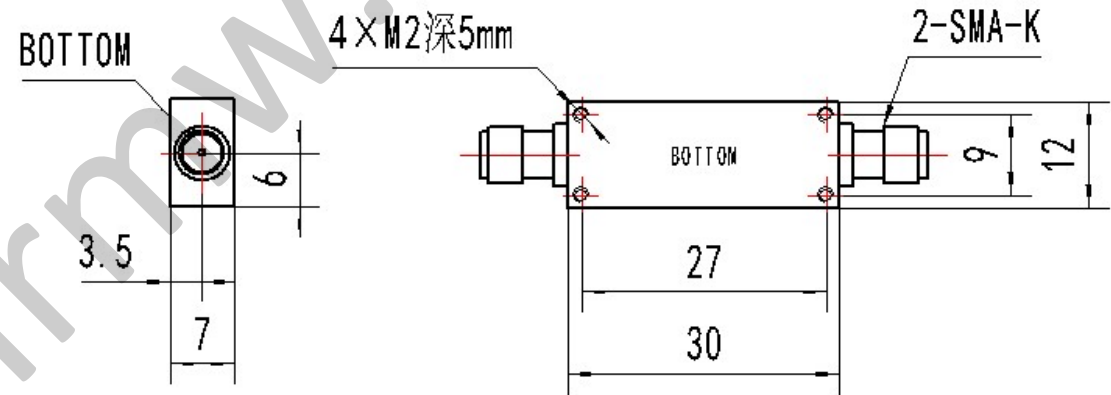

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 .XXX±0.012			莱尔微波 Laird Microwave www.lairmw.com sales@lairmw.com	P/N:LBF-1001	
	Approvals	DATE		1500-1700MHz介质带通滤波器Band Pass Filter	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN		SIZE	A3
		ENG		CAGE NO	
		CHK		DWG NO.	
		Q.A.		SCALE	3:2
				UNIT	mm
				SHEET	1 OF 1
				REV	1