
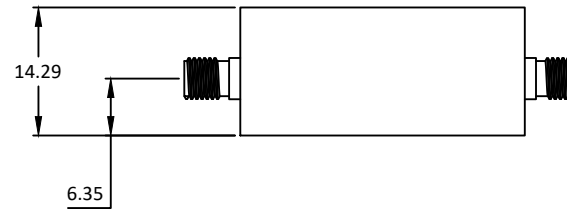
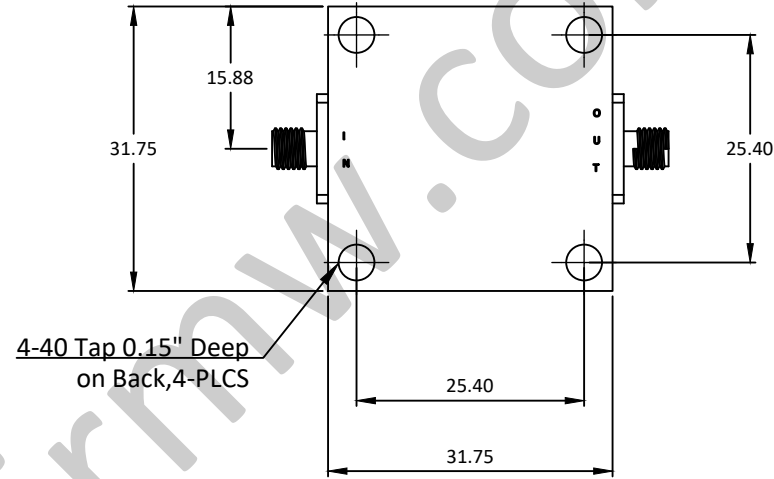


NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

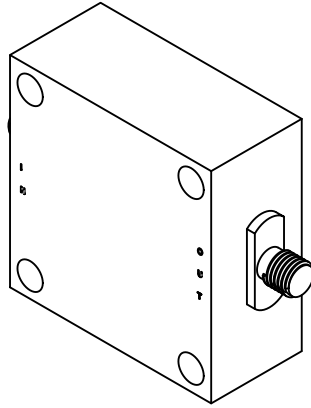

LBF-5014

892 - 918MHz 带通滤波器 Band Pass Filter

—电气技术参数Electrical Specifications—

通带 Pass Band:	892-918MHz
中心频率Center Frequency:	905MHz
插入损耗Insertion Loss:	2dB
带外抑制Rejection:	35dB@860MHz/35dB@950MHz
最大输入功率Maximum Input Power:	+20dBm
群时延Group Delay:	22ns
输入驻波比Input VSWR:	1.8:1
输出驻波比Output VSWR:	1.8:1
工作温度Operation Temperature:	-30 ~ +85℃
存储温度Storage Temperature:	-40 ~ +100℃

—机械技术参数Mechanical Specification—

输入连接器Input Interface:	SMA-F
输出连接器Output Interface:	SMA-F
尺寸Size(excluding connectors):	31.75*31.75*14.29mm
重量Weight:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012						P/N: LBF-5014							
				www.lairmw.com sales@lairmw.com									
		Approvals	DATE	892-918MHz 带通滤波器Band Pass Filter									
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		DRWN		SIZE	A3	CAGE NO		DWG NO.		REV	1
				ENG		SCALE	3:2	UNIT	mm	SHEET 1 OF 1			
				CHK									
				Q.A.									