
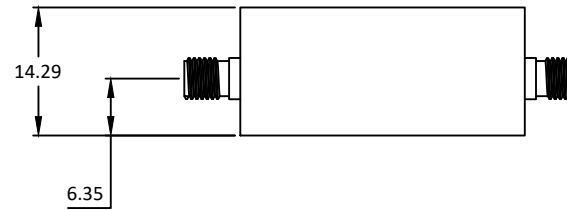
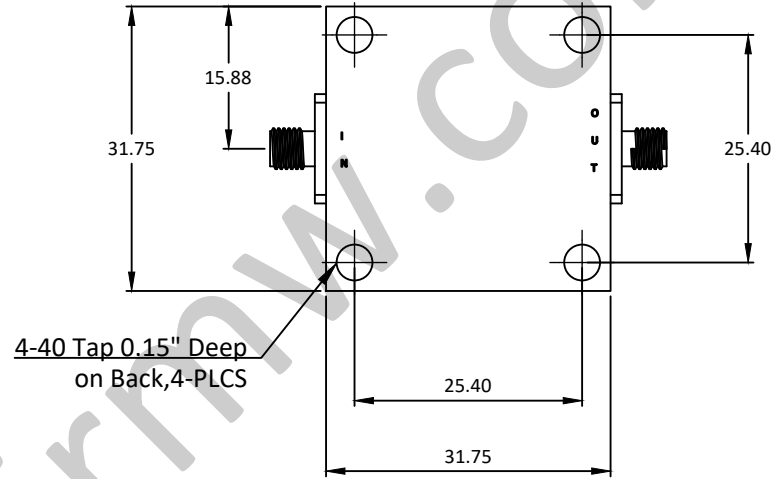


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

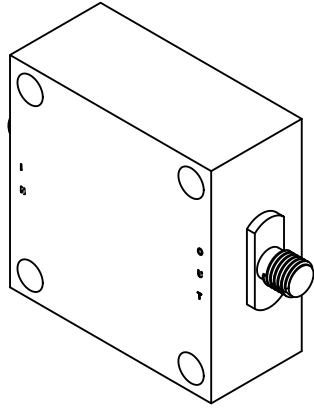

LBF-5015

902 - 928MHz 带通滤波器 Band Pass Filter

—电气技术参数 Electrical Specifications—

通带 Pass Band:	902-928MHz
中心频率 Center Frequency:	915MHz
插入损耗 Insertion Loss:	1.8dB
带外抑制 Rejection:	60dB@870MHz/38dB@960MHz
最大输入功率 Maximum Input Power:	+15dBm
群时延 Group Delay:	30ns
输入驻波比 Input VSWR:	1.4:1
输出驻波比 Output VSWR:	1.4:1
工作温度 Operation Temperature:	-30 ~ +85°C
存储温度 Storage Temperature:	-40 ~ +100°C

—机械技术参数 Mechanical Specification—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	31.75*31.75*14.29mm
重量 Weight:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			 www.lairmw.com sales@lairmw.com	P/N: LBF-5015	
	Approvals	DATE		902-928MHz 带通滤波器 Band Pass Filter	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03	DRWN	ENG	CHK	Q.A.
		SIZE	A3	CAGE NO	DWG NO.
		SCALE	3:2	UNIT	mm
					REV 1
		SHEET 1 OF 1			