
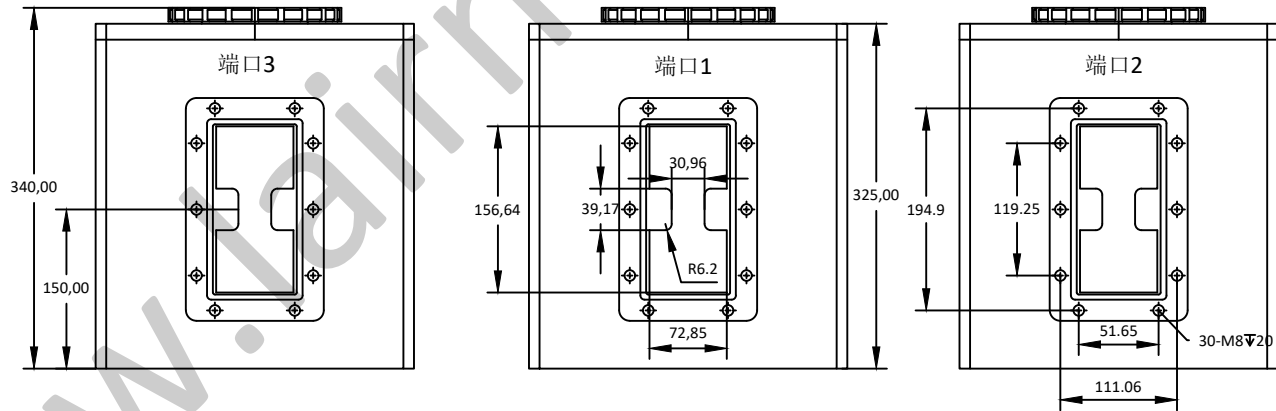


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

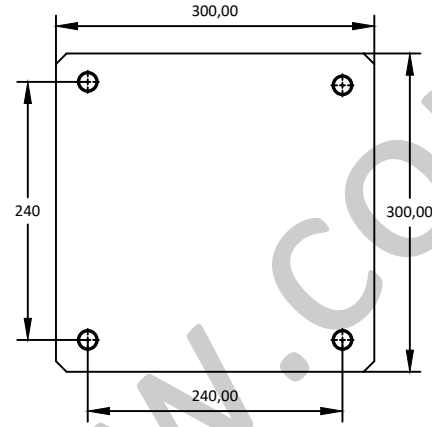

## LBS-0003

0.8 - 2GHz 单刀双掷波导开关 SPDT Waveguide Switch

### —电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	0.8- 2GHz
隔离度 Isolation:	≥50dB
插入损耗 Insertion Loss:	≤0.25dB
驻波 VSWR:	≤1.2
切换时间 Switching Time:	手工切换 (约1s)
直流偏置电压 DC Supply Voltage:	/
直流偏置电流 DC Supply Current:	/
工作温度 Operation Temperature:	-40 ~ +85℃
存储温度 Storage Temperature:	-55 ~ +80℃

### —机械技术参数 Mechanical Specification—

法兰接口 Flange Interface:	FPWRD84
控制接口 Control Interface:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			 www.lairmw.com sales@lairmw.com	P/N: LBS-0003	
	Approvals	DATE		0.8-2GHz 单刀双掷波导开关 SPDT Waveguide Switch	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN			
		ENG			
		CHK	SIZE	CAGE NO	DWG NO.
		Q.A.	A3		REV
			SCALE	UNIT	SHEET 1 OF 1
			3:2	mm	1