


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

| REVISION HISTORY | | | | | |
|------------------|-----|---------------------|----------|------|----------|
| ZONE | REV | DESCRIPTION | E.C.O.NO | DATE | APPROVED |
| | 1 | ENGINEERING RELEASE | | | |

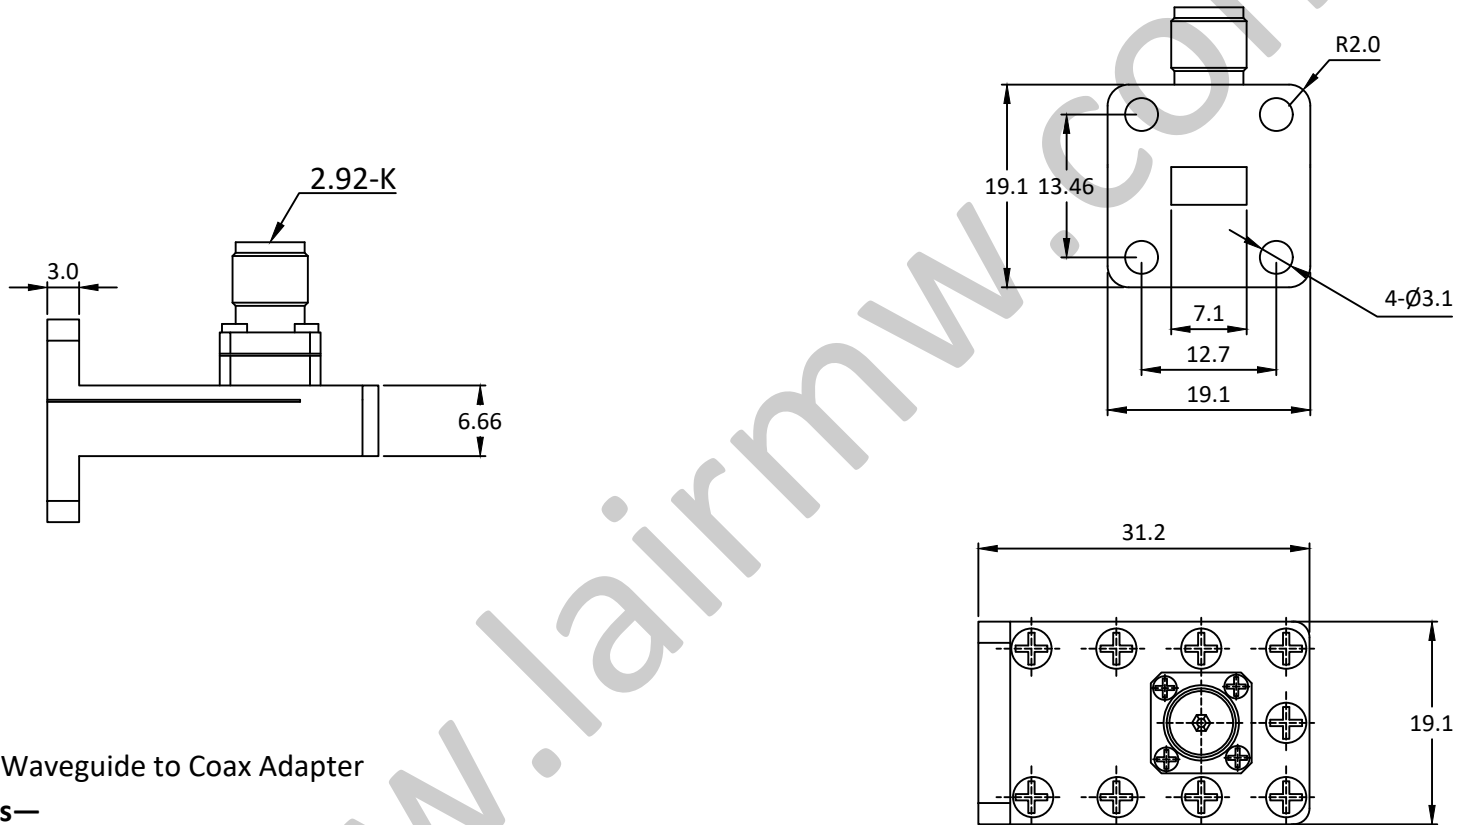

LBT-0005

26.3 - 40GHz 波同转换器 Waveguide to Coax Adapter

—技术参数 Specifications—

工作频率 Frequency Range: 26.3 - 40GHz
 驻波VSWR: ≤ 1.2
 功率Power: 5000W(占空比5%)
 接口Connectors: 2.92-K
 法兰Flange: /

| | | | | | | | |
|--|--|--|--|--|---------|---------------------------------|-----|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 .XXX±0.012 | | | | 莱尔微波 Laird Microwave www.lairm.com sales@lairm.com | | P/N: LBT-0005 | |
| | | | | Approvals: _____ DATE: _____ DRWN: _____ ENG: _____ CHK: _____ Q.A.: _____ | | 波同转换器 Waveguide to Coax Adapter | |
| HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80 | | TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03 | | SIZE | CAGE NO | DWG NO. | REV |
| | | | | A3 | | | 1 |
| | | | | SCALE | UNIT | SHEET 1 OF 1 | |
| | | | | 3:2 | mm | | |