


NOTES: UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

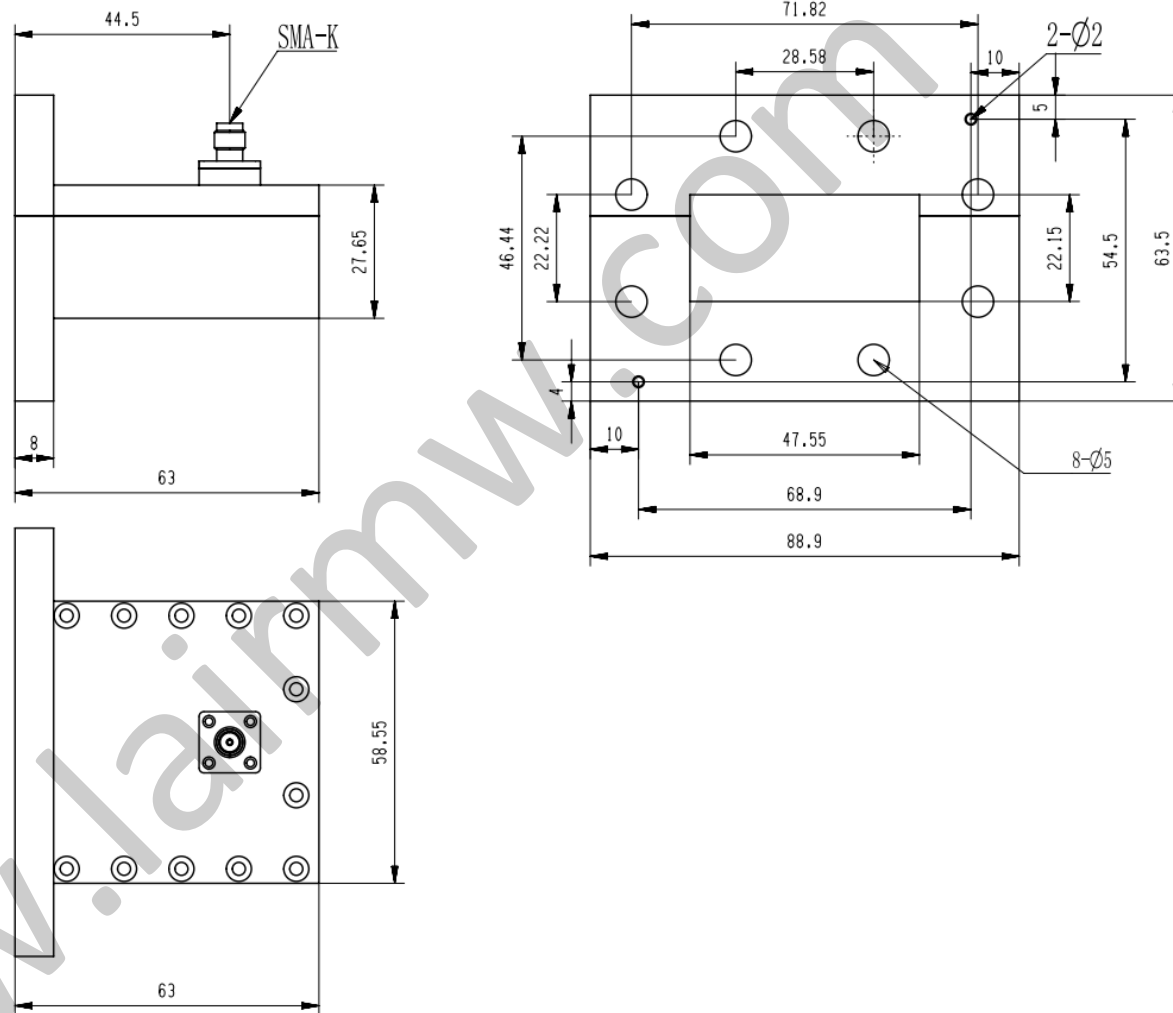

## LBT-0051

3.94 - 5.99GHz 波同转换器 Waveguide to Coax Adapter

— 技术参数 Specifications —

工作频率 Frequency Range:

3.94 - 5.99GHz

驻波 VSWR:

≤ 1.2

插入损耗 Insertion Loss:

≤ 0.3dB

波导接口 Waveguide

/

Connector: 同轴接口 Coaxial

SMA-K

Connector: 法兰 Flange:

FDP48 (加销钉孔)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.03 .XXX±0.012					P/N: LBT-0051	
	Approvals: _____ DATE: _____		www.lairm.com sales@lairm.com			
DRWN: _____ ENG: _____ CHK: _____ Q.A.: _____			波同转换器 Waveguide to Coax Adapter			
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +05/-02 +10/-03 +15/-03 +20/-03 +25/-03 +30/-03		SIZE A3	CAGE NO	DWG NO.
				SCALE 3:2	UNIT mm	REV 1
SHEET 1 OF 1						