

NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LDA-4006


2MHz - 7GHz 数控衰减器 Digital Controlled Attenuator

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	2MHz - 7GHz
衰减范围 Attenuation Range:	0 - 63dB
插入损耗 Insertion Loss:	7.0dB Max
输入驻波比 Input VSWR:	2.0:1 Max
输出驻波比 Output VSWR:	2.0:1 Max
步进 Step:	,2,4,8,16,32dB
控制逻辑 Control Logic:	TTL high on
直流供电 Power Supply:	-12V@50mA
切换时间 Switching Time:	90 ns Typ
工作温度 Operating Temperature:	-25 ~ +71°C
存储温度 Storage Temperature:	-65 ~ +100°C

—机械技术参数 Mechanical Specification—

输入连接器 Input Interface:	SMA-F
输出连接器 Out Interface:	SMA-F
尺寸 Size(excluding connectors):	/
直流连接器 DC Connector:	/

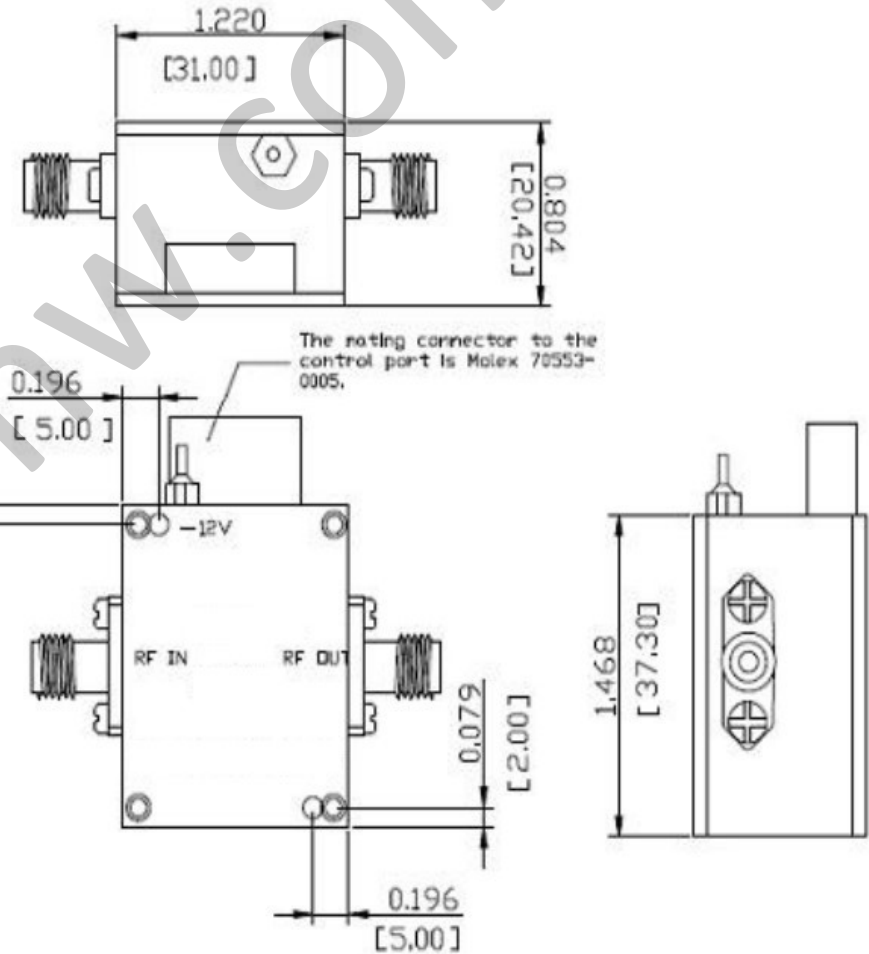

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012		莱尔微波 www.lairmw.com sales@lairmw.com		P/N: LDA-4006			
		Approvals	DATE	2MHz-7GHz数控衰减器 Digital Controlled Attenuator 最小步进 LSB 1dB			
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/-0.2 +.10/-0.3 +.15/-0.3 +.20/-0.3 +.25/-0.3 +.30/-0.3	DRWN		SIZE A3	CAGE NO	DWG NO.	REV 1
		ENG		SCALE 3:2	UNIT mm	SHEET 1 OF 1	
		CHK					
		Q.A.					