

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LDC-0005


4.0 – 8.0 GHz 6dB 定向耦合器 Directional Coupler

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	4.0 – 8.0 GHz
耦合度 Coupling:	6±1.0dB
插入损耗 Insertion Loss:	< 2.0dB(包含理论耦合损耗)
方向性 Directivity:	≥ 15dB
最大驻波比 Maximum VSWR:	1.35
阻抗 Impedance:	50 Ohms
功率承载能力 Power Handling :	10 Watt

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

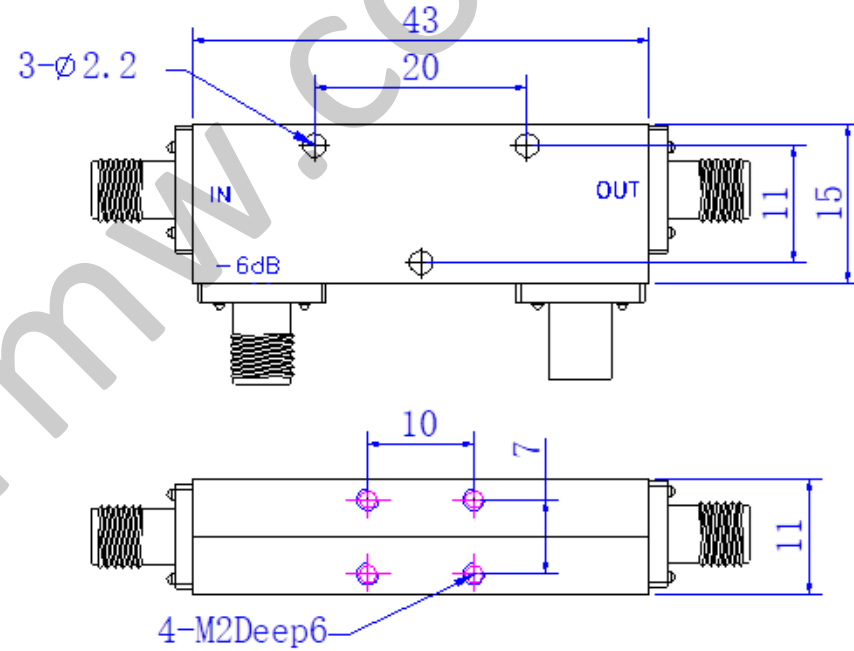

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012			莱尔微波 Laird Microwave www.lairmw.com sales@lairmw.com	P/N: LDC-0005	
	Approvals	DATE		4.0 - 8.0 GHz 定向耦合器 Directional Coupler	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	SIZE A3	CAGE NO	DWG NO.
		ENG	SCALE 3:2	UNIT mm	REV 1
		CHK	SHEET 1 OF 1		
		Q.A.			