

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			


LDP-1001

—电气技术参数 Electrical Specifications—

通带频率 Passband Frequency:	1500 – 1550MHz/1650-1700MHz
通带插损 Passband Insertion Loss:	≤1.5dB
相互抑制 Suppression:	≥50dBc
驻波 VSWR:	≤1.5:1
功率Power:	20W
工作温度 Operation Temperature:	-55 ~ +85°C
存储温度Storage Temperature:	-40 ~ +70°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	Φ0.8针
输出连接器 Output Interface:	Φ0.8针
尺寸 Size (excluding connectors):	/
重量 Weight:	/

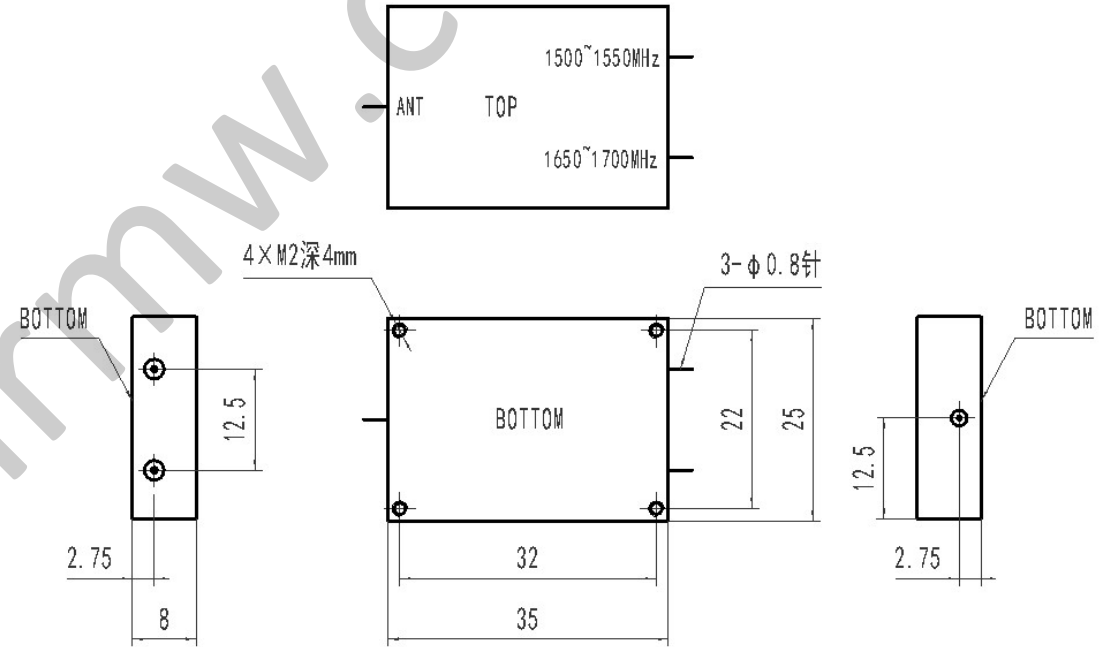

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012			莱尔微波 Laird Microwave www.lairmw.com sales@lairmw.com		P/N: LDP-1001				
			Approvals		DATE		介质双工器Duplexer		
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN		SIZE	A3	CAGE NO.	DWG NO.	REV	1
		ENG		SCALE	3:2	UNIT	mm	SHEET 1 OF 1	
		CHK		Q.A.					