
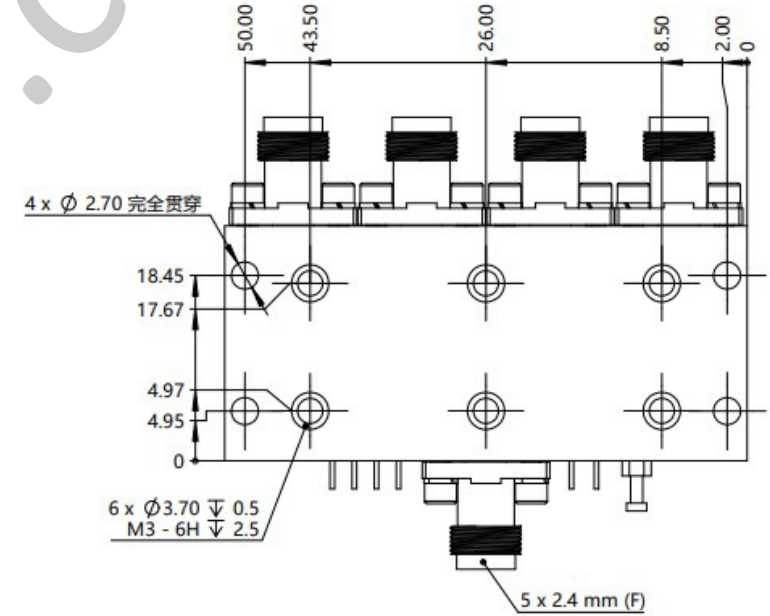
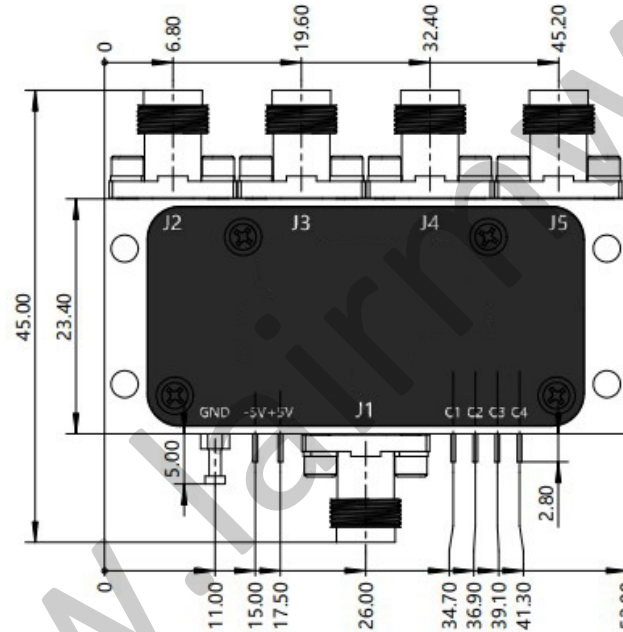


NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

Truth Table

TTL				J2	J3	J4	J5
C1	C2	C3	C4				
1	0	0	0	ON	OFF	OFF	OFF
0	1	0	0	OFF	ON	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF
0	0	0	1	OFF	OFF	OFF	ON

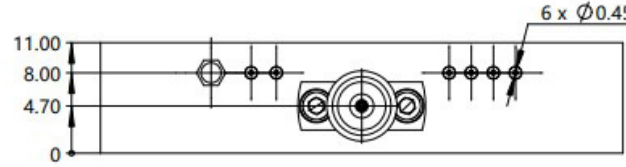

LES-2016

0.2 - 50GHz PIN吸收式单刀四掷开关 PIN Absorption SP4T Switch

—电气技术参数Electrical Specifications—

频率范围 Frequency Range:	0.2 - 50GHz
隔离度 Isolation:	60dB(Typ.)
插入损耗 Insertion Loss:	3.0 - 11dB
驻波 VSWR:	1.7:1(Typ.)
开关速度 Switching Speed:	100ns
最大输入功率 Maximum Input Power:	+23dBm
控制方式 Control Mode:	TTL(详见真值表)
直流偏置电压 DC Supply Voltage:	±5V
直流偏置电流 DC Supply Current:	60mA(Max)
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-65 ~ +125°C

—机械技术参数Mechanical Specification—

输入连接器 Input Interface:	2.4mm-F
输出连接器 Output Interface:	2.4mm-F
尺寸 Size(excluding connectors):	52x23.4x11mm
重量 Weight:	45g

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1° ±2/5 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LES-2016																			
<table border="1"> <tr> <td>DRWN</td> <td>DATE</td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		DRWN	DATE	ENG		CHK		Q.A.		<table border="1"> <tr> <td colspan="2">0.2-50GHz PIN吸收式单刀四掷开关 PIN Absorption SP4T Switch</td> </tr> <tr> <td>SIZE</td> <td>REV</td> </tr> <tr> <td>A3</td> <td>1</td> </tr> </table>		0.2-50GHz PIN吸收式单刀四掷开关 PIN Absorption SP4T Switch		SIZE	REV	A3	1	<table border="1"> <tr> <td>CAGE NO</td> <td>DWG NO.</td> </tr> <tr> <td>UNIT</td> <td>SHEET 1 OF 1</td> </tr> <tr> <td>mm</td> <td></td> </tr> </table>		CAGE NO	DWG NO.	UNIT	SHEET 1 OF 1	mm	
DRWN	DATE																								
ENG																									
CHK																									
Q.A.																									
0.2-50GHz PIN吸收式单刀四掷开关 PIN Absorption SP4T Switch																									
SIZE	REV																								
A3	1																								
CAGE NO	DWG NO.																								
UNIT	SHEET 1 OF 1																								
mm																									
<table border="1"> <tr> <td>HOLE DIAMETER</td> <td>TOLERANCES</td> </tr> <tr> <td>.35 TO 3.20</td> <td>+.05/- .02</td> </tr> <tr> <td>3.21 TO 6.35</td> <td>+.10/- .03</td> </tr> <tr> <td>6.36 TO 12.70</td> <td>+.15/- .03</td> </tr> <tr> <td>12.71 TO 19.05</td> <td>+.20/- .03</td> </tr> <tr> <td>19.06 TO 25.40</td> <td>+.25/- .03</td> </tr> <tr> <td>25.41 TO 50.80</td> <td>+.30/- .03</td> </tr> </table>		HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+.05/- .02	3.21 TO 6.35	+.10/- .03	6.36 TO 12.70	+.15/- .03	12.71 TO 19.05	+.20/- .03	19.06 TO 25.40	+.25/- .03	25.41 TO 50.80	+.30/- .03	<table border="1"> <tr> <td>APPROVALS</td> <td>DATE</td> </tr> <tr> <td></td> <td></td> </tr> </table>		APPROVALS	DATE			<table border="1"> <tr> <td>SCALE</td> <td>3:2</td> </tr> </table>		SCALE	3:2
HOLE DIAMETER	TOLERANCES																								
.35 TO 3.20	+.05/- .02																								
3.21 TO 6.35	+.10/- .03																								
6.36 TO 12.70	+.15/- .03																								
12.71 TO 19.05	+.20/- .03																								
19.06 TO 25.40	+.25/- .03																								
25.41 TO 50.80	+.30/- .03																								
APPROVALS	DATE																								
SCALE	3:2																								