

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

Truth Table

E0	E1	通道状态
0	0	J0-J1 通
1	0	J0-J2 通
0	1	J0-J3 通
1	1	J0-J4 通

LES-6001


30MHz - 1.0GHz 单刀四掷开关 SP4T Switch

—电气技术参数Electrical Specifications—

频率范围 Frequency Range:	30MHz - 1.0GHz
隔离度 Isolation:	80dB
插入损耗 Insertion Loss:	1.0dB(Max)
输入输出驻波 Input/Output VSWR:	1.6:1(Max)
开关速度 Switching Speed:	5us
承受功率 Power Handling:	200W(Max)
阻抗 Impedance:	50 Ohms
控制方式 Control Mode:	TTL(详见真值表)
直流偏置电压 DC Supply Voltage:	12V
工作温度 Operation Temperature:	-40 ~ +85°C

—机械技术参数Mechanical Specification—

输入连接器Input Interface:	SMA-F
输出连接器Output Interface:	SMA-F
尺寸Size(excluding connectors):	75x60x20mm
重量Weight:	200g

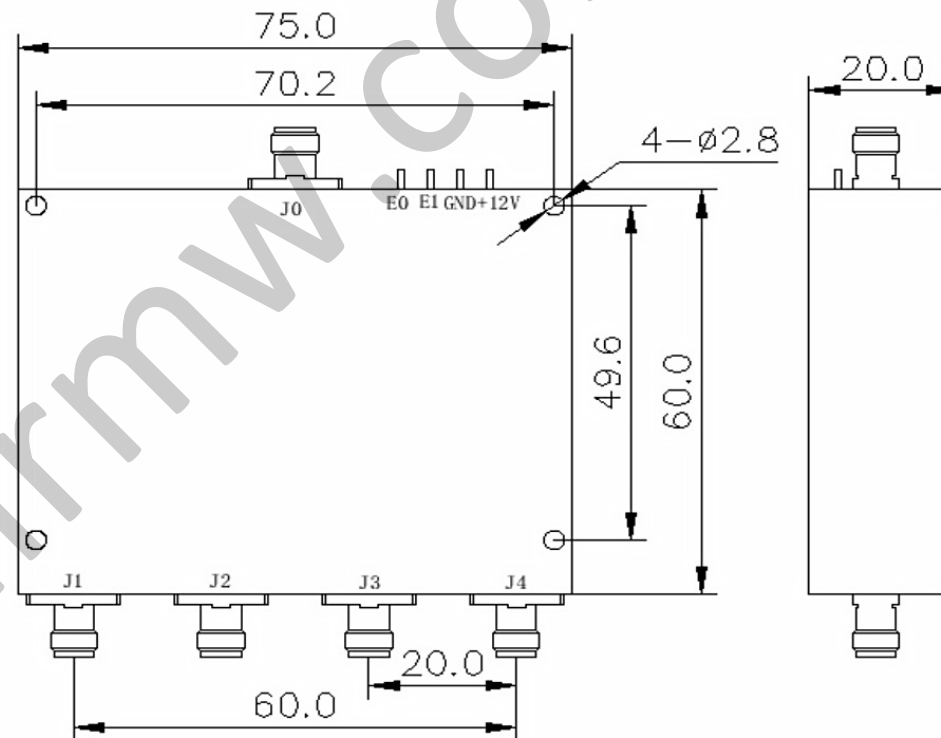

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012					P/N: LES-6001		
	Approvals		DATE		www.lairmw.com sales@lairmw.com		
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03	DRWN	ENG	CHK	Q.A.	DATE	
30MHz-1.0GHz 单刀四掷开关 SP4T Switch				SIZE	CAGE NO	DWG NO.	REV
				A3			1
				SCALE	UNIT	SHEET 1 OF 1	
				3:2	mm		