

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY


REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LFC-5003

2 – 500 MHz 混频器 Frequency Mixer

—电气技术参数 Electrical Specifications—

射频范围 RF Range:	2 – 500MHz
本振范围 LO Range:	2 – 500MHz
中频范围 IF Range:	DC – 500MHz
LO-RF 隔离度 LO-RF Isolation:	45dB
LO-IF 隔离度 LO-IF Isolation:	45dB
RF-IF 隔离度 RF-IF Isolation:	/
变频损耗 Conversion Loss:	6dB
本振功率 LO Power:	7dBm
输入功率三阶截断点 IIP3:	16dBm
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-55 ~ +100°C

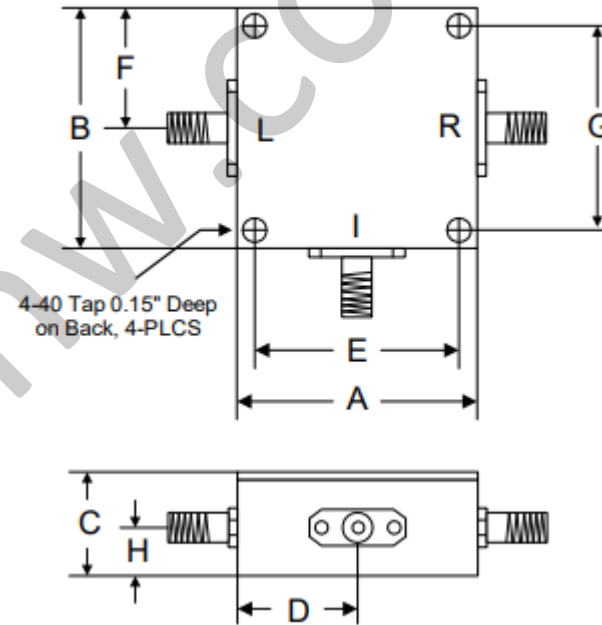

	A	B	C	D	E	F	G	H
Inch	1.250	1.250	0.563	0.625	1.000	0.625	1.000	0.250
mm	31.75	31.75	14.29	15.88	25.40	15.88	25.40	6.35

—机械技术参数 Mechanical Specifications—

RF 连接器 RF Interface:	SMA-F
LO 连接器 LO Interface:	SMA-F
IF 连接器 IF Interface:	SMA-F
尺寸 Size(excluding connectors) :	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012				P/N: LFC-5003																																
		www.lairmw.com sales@lairmw.com		2 – 500 MHz 混频器 Frequency Mixer 本振功率 LO Power 7 dBm																																
<table border="1"> <tr> <td>HOLE DIAMETER</td> <td>TOLERANCES</td> </tr> <tr> <td>.35 TO 3.20</td> <td>+.05/- .02</td> </tr> <tr> <td>3.21 TO 6.35</td> <td>+.10/- .03</td> </tr> <tr> <td>6.36 TO 12.70</td> <td>+.15/- .03</td> </tr> <tr> <td>12.71 TO 19.05</td> <td>+.20/- .03</td> </tr> <tr> <td>19.06 TO 25.40</td> <td>+.25/- .03</td> </tr> <tr> <td>25.41 TO 50.80</td> <td>+.30/- .03</td> </tr> </table>	HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+.05/- .02	3.21 TO 6.35	+.10/- .03	6.36 TO 12.70	+.15/- .03	12.71 TO 19.05	+.20/- .03	19.06 TO 25.40	+.25/- .03	25.41 TO 50.80	+.30/- .03	<table border="1"> <tr> <td>Approvals</td> <td>DATE</td> </tr> <tr> <td>DRWN</td> <td></td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>	Approvals	DATE	DRWN		ENG		CHK		Q.A.		<table border="1"> <tr> <td>SIZE</td> <td>CAGE NO</td> <td>DWG NO.</td> <td>REV</td> </tr> <tr> <td>A3</td> <td></td> <td></td> <td>1</td> </tr> </table>	SIZE	CAGE NO	DWG NO.	REV	A3			1	2 – 500 MHz 混频器 Frequency Mixer 本振功率 LO Power 7 dBm	
	HOLE DIAMETER	TOLERANCES																																		
.35 TO 3.20	+.05/- .02																																			
3.21 TO 6.35	+.10/- .03																																			
6.36 TO 12.70	+.15/- .03																																			
12.71 TO 19.05	+.20/- .03																																			
19.06 TO 25.40	+.25/- .03																																			
25.41 TO 50.80	+.30/- .03																																			
Approvals	DATE																																			
DRWN																																				
ENG																																				
CHK																																				
Q.A.																																				
SIZE	CAGE NO	DWG NO.	REV																																	
A3			1																																	
SCALE 3:2		UNIT mm	SHEET 1 OF 1																																	