


NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

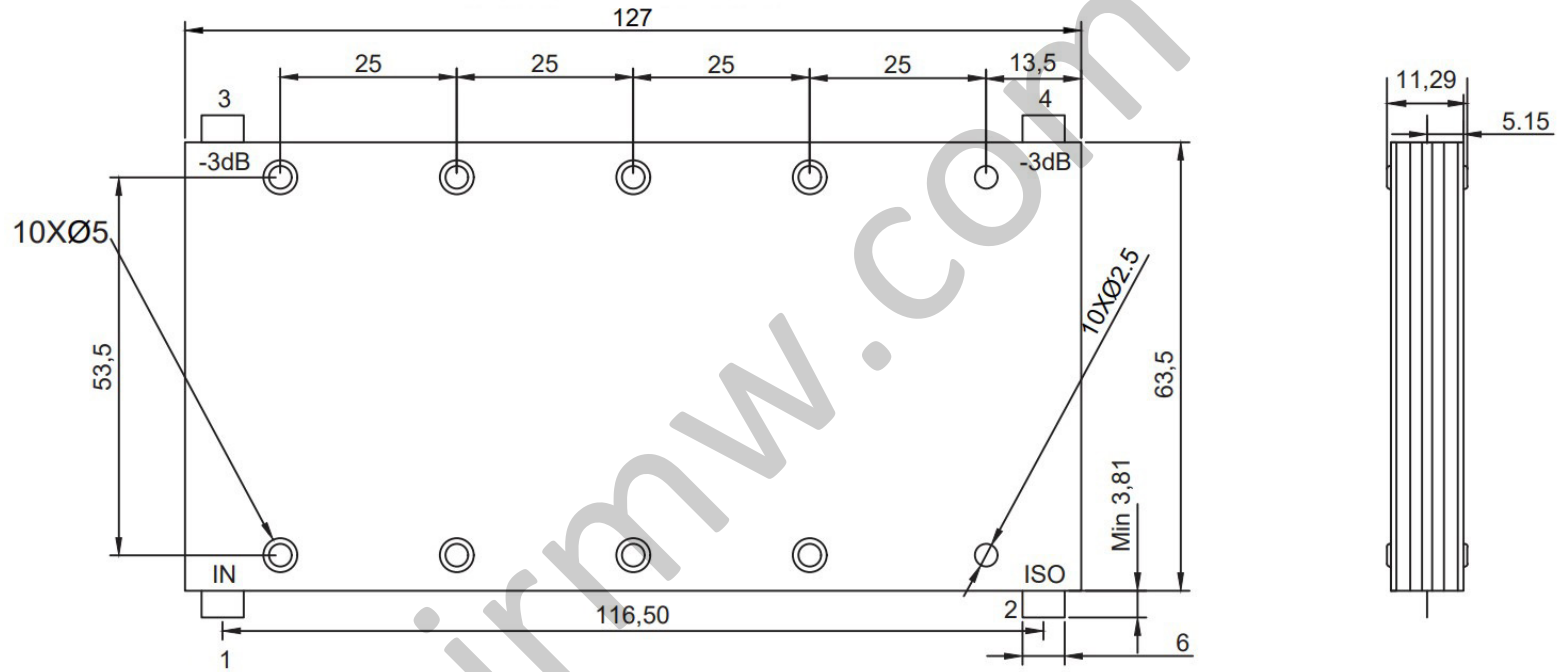

LHC-1001

120 – 500 MHz 3dB 电桥 Hybrid Coupler 3dB, 90°

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	120 – 500 MHz
隔离度 Isolation:	18dB(Min)
插入损耗 Insertion Loss:	0.55dB(Max)
驻波比 VSWR:	1.29(Max)
幅度平衡 Amplitude Balance:	±0.7dB(Max)
相位平衡 Phase Balance:	90±3.0°
功率 Power:	800 CW Watt
工作温度 Operating Temperature:	-55~+95 °C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012					P/N: LHC-1001	
	Approvals	DATE	www.lairmw.com sales@lairmw.com			
HOLE DIAMETER	TOLERANCES	DRWN	120 - 500MHz 3dB 电桥 Hybrid Coupler 3dB,90°			
.35 TO 3.20	+.05/- .02	ENG	SIZE	CAGE NO	DWG NO.	REV
3.21 TO 6.35	+.10/- .03	CHK	A3			1
6.36 TO 12.70	+.15/- .03	Q.A.	SCALE	UNIT	SHEET 1 OF 1	
12.71 TO 19.05	+.20/- .03		3:2	mm		
19.06 TO 25.40	+.25/- .03					
25.41 TO 50.80	+.30/- .03					