


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

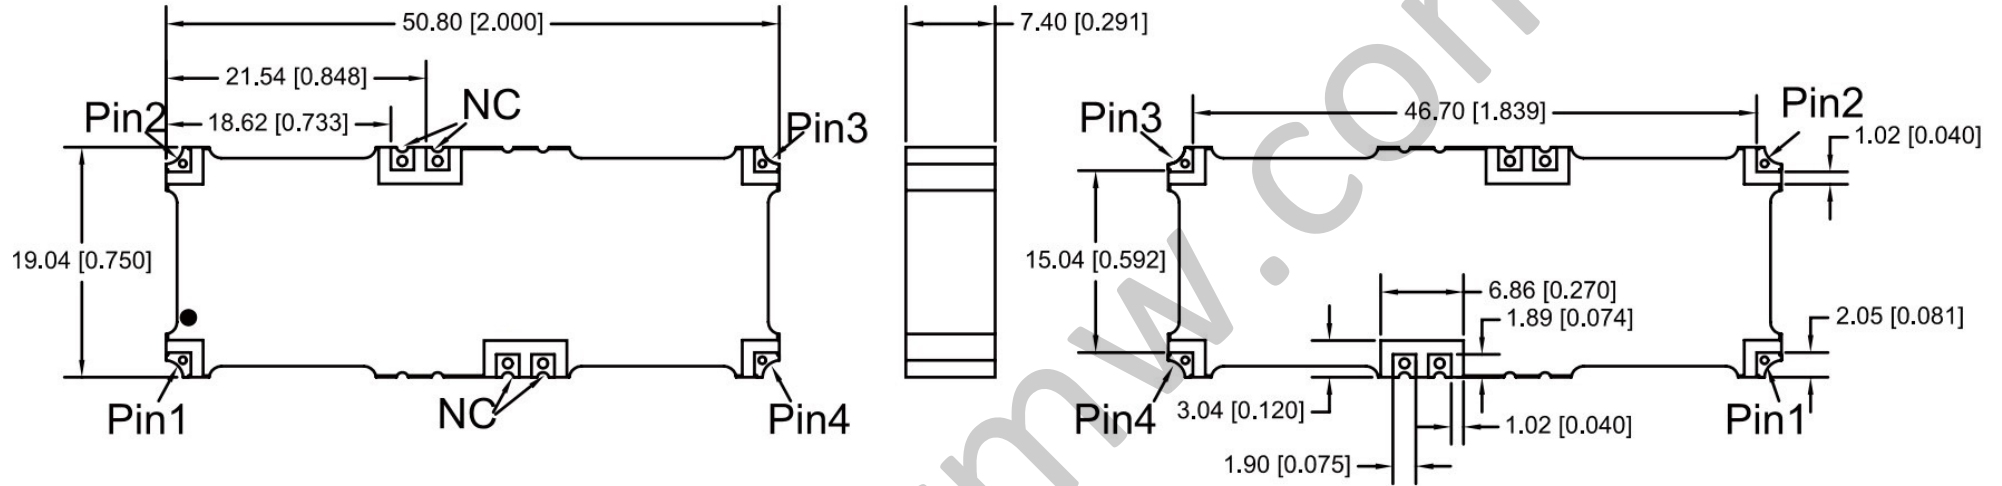

LHC-1002

88 – 520 MHz 3dB 电桥 Hybrid Coupler 3dB, 90°

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	88 – 520 MHz
隔离度 Isolation:	13dB(Min)
插入损耗 Insertion Loss:	0.75dB(Max)
驻波比 VSWR:	1.5(Max)
幅度平衡 Amplitude Balance:	±0.8dB(Max)
相位平衡 Phase Balance:	90±7.0°
功率 Power:	200 CW Watt
工作温度 Operating Temperature:	-55~+95 °C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1' ±2/5 .XX±0.03 .XXX±0.012					P/N: LHC-1002	
	Approvals		DATE		www.lairmw.com sales@lairmw.com	
DRWN		DATE		88 - 520MHz 3dB 电桥 Hybrid Coupler 3dB,90°		
ENG		DATE		SIZE	CAGE NO	DWG NO.
CHK		DATE		A3		REV 1
Q.A.		DATE		SCALE	UNIT	SHEET 1 OF 1
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		3:2	mm	