

## 低温低通滤波器 Cryogenic Low Pass Filter

### 特点 Features


- 频率范围 Frequency Range: DC~11MHz
- 射频端口 RF Port: SMA-JK
- 工作温区 Operation Temperature: 4K



### 规格 Electrical Specification

频率范围 Frequency Range	DC~11MHz
插入损耗 Insertion Loss	1.0dB
回波损耗 Return Loss	15dB
带外抑制 Out Of Band Rejection	40dB@23~200MHz
工作温区 Operation Temperature	4K
存储温度 Storage Temperature	-55~+85°C
射频端口 RF Port	SMA-JK 型同轴端口
腔体 Cavity	铜镀金外壳 Gold Plated Copper
外形尺寸 Dimension	φ(15)x70mm
重量 Weight	60g

### 性能 Typical Performance

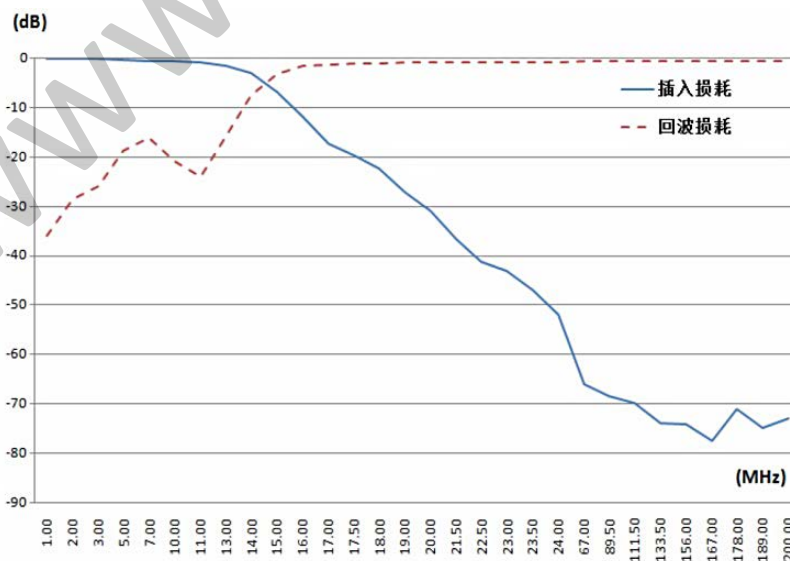

插入损耗及回波损耗测试曲线 Insertion Loss & Return Loss Test Curve

低温低通滤波器 Cryogenic Low Pass Filter

外形尺寸 Dimension(单位 Unit: mm)

