
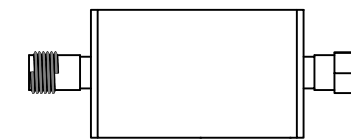
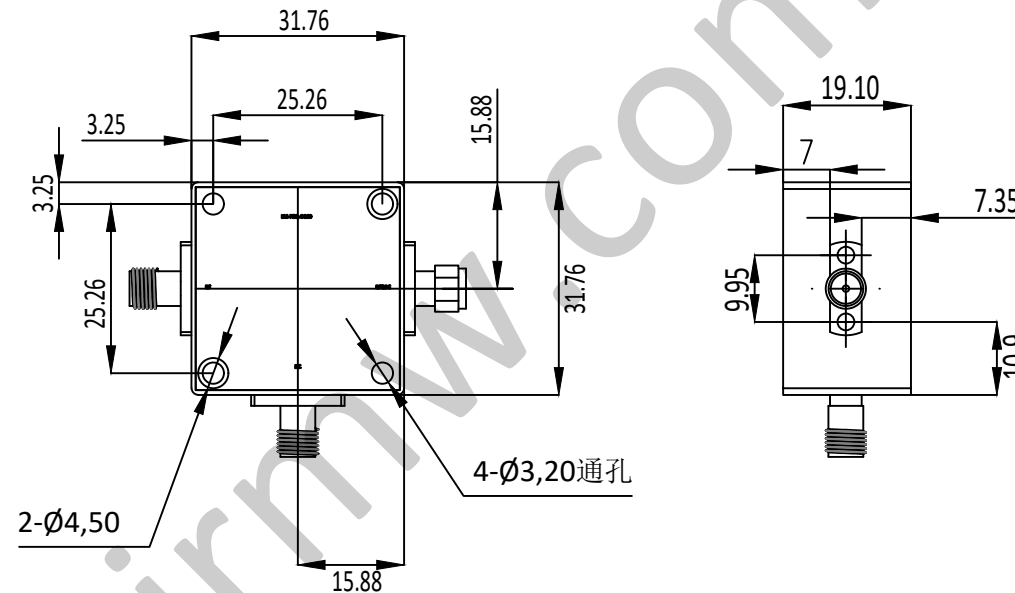


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			



LM-PZQ-0160

0.1 - 6GHz 偏置器 Bias Tee


—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	0.1 - 6GHz
插入损耗 Insertion Loss:	1.3dB
直流端隔离度 DC Terminal Isolation:	25dB
驻波 VSWR:	1.30
最大直流电流 Maximum DC Current:	500mA
直流电压 DC Voltage:	30V

—机械技术参数 Mechanical Specification—

RF连接器 RF Interface:	SMA-F
RF&DC连接器 RF&DC Interface:	SMA-M
尺寸 Size(excluding connectors):	/
重量 Weight:	/

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE MILLIMETER
TOLERANCES ARE:
DECIMALS ANGLES FRACTIONS
.X±0.1 ±1° ±2/5
.XX±0.03
.XXX±0.012



Approvals

DATE

DRWN

ENG

CHK

Q.A.

HOLE DIAMETER	TOLERANCES
.35 TO 3.20	+0.05/-0.02
3.21 TO 6.35	+0.10/-0.03
6.36 TO 12.70	+0.15/-0.03
12.71 TO 19.05	+0.20/-0.03
19.06 TO 25.40	+0.25/-0.03
25.41 TO 50.80	+0.30/-0.03



www.lairmw.com sales@lairmw.com

P/N: LM-PZQ-0160

0.1-6GHz 偏置器 Bias Tee

SIZE	CAGE NO	DWG NO.	REV
A3			1
SCALE	UNIT	SHEET 1 OF 1	
3:2	mm		