

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LPD429-2-40


2000 – 40000 MHz 功分/合路器 Power Splitter/Combiner

—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	2000 – 40000 MHz
隔离度 Isolation:	20dB(Typ.)/15dB(Min.)
插入损耗 Insertion Loss:	≤3.0dB
相位平衡 Phase Balance:	±10°
幅度平衡 Amplitude Balance:	±0.5dB
输入驻波比 Input VSWR:	1.28(Typ.)/1.5(Max.)
输出驻波比 Output VSWR:	1.26(Typ.)/1.5(Max.)
承受功率 Power Rating:	20W(Splitter)/1W(Combiner)
工作温度 Operation Temperature:	-45 ~ +85°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	2.92mm-F
输出连接器 Output Interface:	2.92mm-F
尺寸 Size (excluding connectors):	52*46*10mm
重量 Weight:	120g

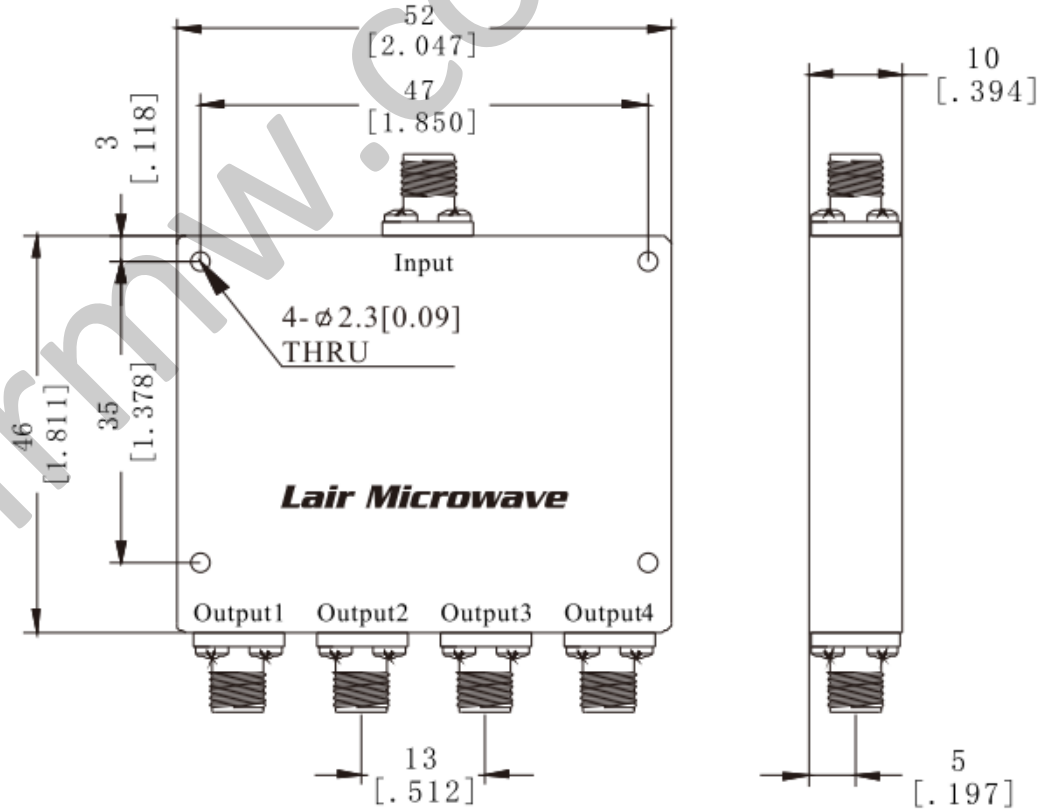

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LPD429-2-40															
<table border="1"> <tr> <td>DRWN</td> <td>DATE</td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		DRWN	DATE	ENG		CHK		Q.A.		2000 – 40000 MHz 功分/合路器 Power Splitter/Combiner											
DRWN	DATE																				
ENG																					
CHK																					
Q.A.																					
<table border="1"> <tr> <td>HOLE DIAMETER</td> <td>TOLERANCES</td> </tr> <tr> <td>.35 TO 3.20</td> <td>+0.05/-0.02</td> </tr> <tr> <td>3.21 TO 6.35</td> <td>+0.10/-0.03</td> </tr> <tr> <td>6.36 TO 12.70</td> <td>+0.15/-0.03</td> </tr> <tr> <td>12.71 TO 19.05</td> <td>+0.20/-0.03</td> </tr> <tr> <td>19.06 TO 25.40</td> <td>+0.25/-0.03</td> </tr> <tr> <td>25.41 TO 50.80</td> <td>+0.30/-0.03</td> </tr> </table>		HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+0.05/-0.02	3.21 TO 6.35	+0.10/-0.03	6.36 TO 12.70	+0.15/-0.03	12.71 TO 19.05	+0.20/-0.03	19.06 TO 25.40	+0.25/-0.03	25.41 TO 50.80	+0.30/-0.03	SIZE	CAGE NO	DWG NO.	REV		
HOLE DIAMETER	TOLERANCES																				
.35 TO 3.20	+0.05/-0.02																				
3.21 TO 6.35	+0.10/-0.03																				
6.36 TO 12.70	+0.15/-0.03																				
12.71 TO 19.05	+0.20/-0.03																				
19.06 TO 25.40	+0.25/-0.03																				
25.41 TO 50.80	+0.30/-0.03																				
		A3			1																
		SCALE	UNIT	SHEET		1 OF 1															
		3:2	mm	1																	