

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

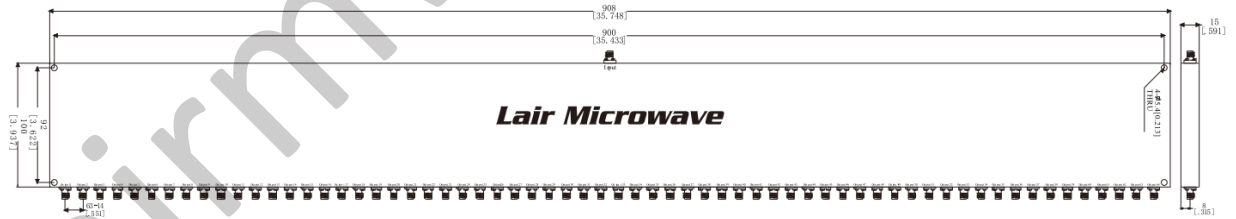
REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LPD64S-1-2

1000 – 2000 MHz 功分/合路器 Power Splitter/Combiner



—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	1000 – 2000 MHz
隔离度 Isolation:	28dB(Typ.)/18dB(Min.)
插入损耗 Insertion Loss:	≤1.8dB
相位平衡 Phase Balance:	±8°
幅度平衡 Amplitude Balance:	≤0.5dB
输入驻波比 Input VSWR:	1.18(Typ.)/1.5(Max.)
输出驻波比 Output VSWR:	1.16(Typ.)/1.3(Max.)
承受功率 Power Rating:	30W(Splitter)/2W(Combiner)
工作温度 Operation Temperature:	-35 ~ +75°C



—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	908*100*15mm
重量 Weight:	6kg

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			 莱尔微波 Lair Microwave www.lairmw.com sales@lairmw.com	P/N: LPD64S-1-2																													
	<table border="1"> <tr> <td>Approvals</td> <td>DATE</td> </tr> <tr> <td>DRWN</td> <td></td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>	Approvals		DATE	DRWN		ENG		CHK		Q.A.		1000 – 2000 MHz 功分/合路器 Power Splitter/Combiner																				
Approvals	DATE																																
DRWN																																	
ENG																																	
CHK																																	
Q.A.																																	
<table border="1"> <tr> <td>HOLE DIAMETER</td> <td>TOLERANCES</td> </tr> <tr> <td>.35 TO 3.20</td> <td>+0.05/-02</td> </tr> <tr> <td>3.21 TO 6.35</td> <td>+0.10/-03</td> </tr> <tr> <td>6.36 TO 12.70</td> <td>+0.15/-03</td> </tr> <tr> <td>12.71 TO 19.05</td> <td>+0.20/-03</td> </tr> <tr> <td>19.06 TO 25.40</td> <td>+0.25/-03</td> </tr> <tr> <td>25.41 TO 50.80</td> <td>+0.30/-03</td> </tr> </table>	HOLE DIAMETER	TOLERANCES	.35 TO 3.20	+0.05/-02	3.21 TO 6.35	+0.10/-03	6.36 TO 12.70	+0.15/-03	12.71 TO 19.05	+0.20/-03	19.06 TO 25.40	+0.25/-03	25.41 TO 50.80	+0.30/-03	<table border="1"> <tr> <td>SIZE</td> <td>CAGE NO</td> <td>DWG NO.</td> <td>REV</td> </tr> <tr> <td>A3</td> <td></td> <td></td> <td>1</td> </tr> </table>	SIZE	CAGE NO	DWG NO.	REV	A3			1	<table border="1"> <tr> <td>SCALE</td> <td>UNIT</td> <td colspan="2">SHEET 1 OF 1</td> </tr> <tr> <td>3:2</td> <td>mm</td> <td colspan="2"></td> </tr> </table>		SCALE	UNIT	SHEET 1 OF 1		3:2	mm		
HOLE DIAMETER	TOLERANCES																																
.35 TO 3.20	+0.05/-02																																
3.21 TO 6.35	+0.10/-03																																
6.36 TO 12.70	+0.15/-03																																
12.71 TO 19.05	+0.20/-03																																
19.06 TO 25.40	+0.25/-03																																
25.41 TO 50.80	+0.30/-03																																
SIZE	CAGE NO	DWG NO.	REV																														
A3			1																														
SCALE	UNIT	SHEET 1 OF 1																															
3:2	mm																																