

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

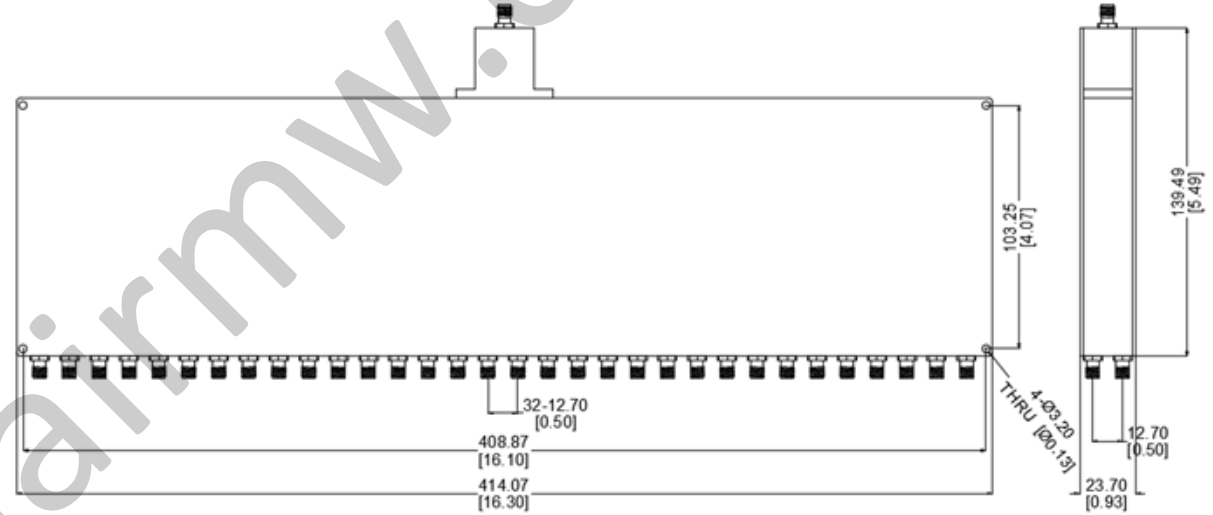
REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LSN-3001

3 – 4 GHz 64路功分器 64 Way Power Splitter



—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	3 – 4 GHz
隔离度 Isolation:	≥20dB(Max)
插入损耗 Insertion Loss :	2.0dB(Max)
相位平衡 Phase Balance:	±10°(Max)
幅度平衡 Amplitude Balance:	±0.6dB(Max)
输入驻波比 Input VSWR:	1.5:1(Max)
输出驻波比 Output VSWR:	1.3:1(Max)
最大输入功率Maximum Input Power:	20W(CW)
工作温度 Operation Temperature:	-30 ~ +60°C
存储温度 Storage Temperature:	-50 ~ +85°C



—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	0.6kg

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1° ±2/5 .XXX±0.012					P/N: LSN-3001		
			www.lairmw.com sales@lairmw.com		3 – 4 GHz 64路功分器64 Way Power Splitter		
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	DATE	SIZE A3	CAGE NO	DWG NO.	REV 1
		ENG		SCALE 3:2	UNIT mm	SHEET 1 OF 1	
		CHK					
		Q.A.					