

NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LSN-3002

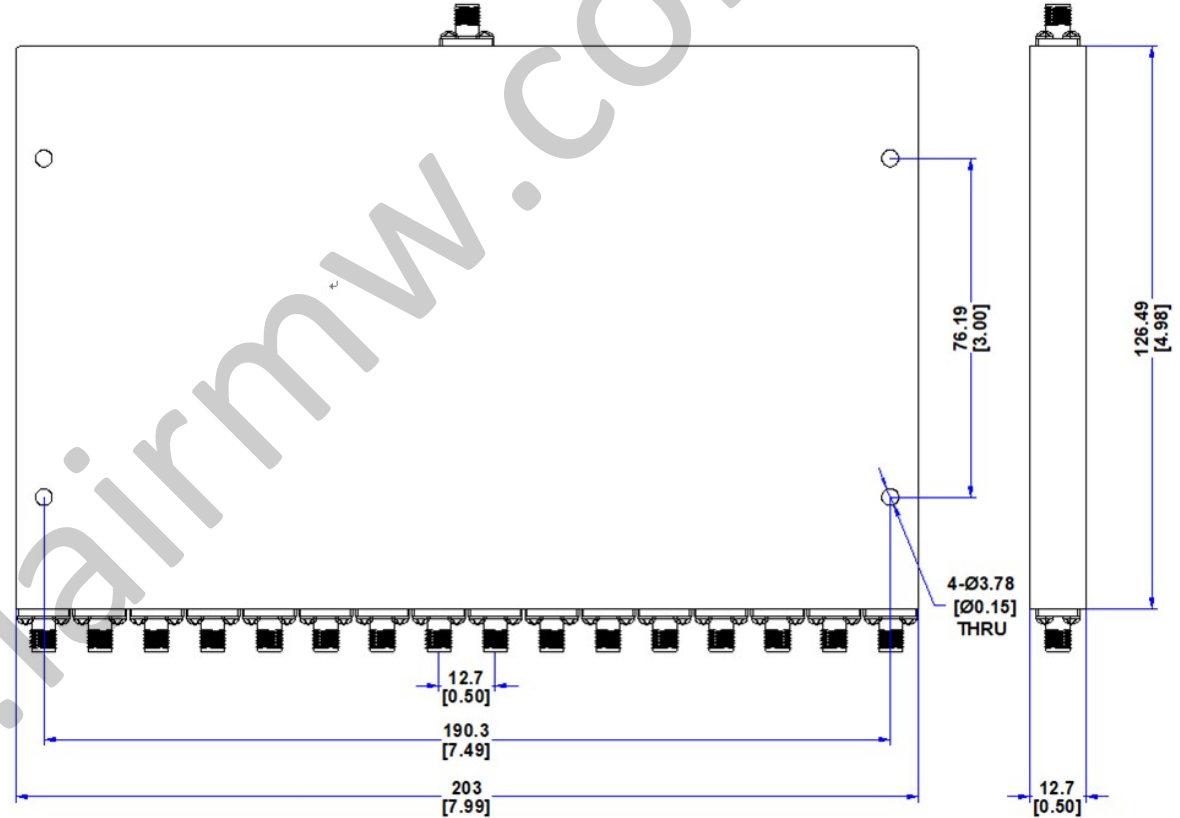
2 – 18 GHz 16 路功分器 16 Way Power Splitter



—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	2 – 18 GHz
隔离度 Isolation:	≥15dB
插入损耗 Insertion Loss :	≤6.9dB
相位平衡 Phase Balance:	≤±9°
幅度平衡 Amplitude Balance:	≤±1.0dB
输入驻波比 Input VSWR:	≤1.7:1
阻抗 Impedance:	50 Ohms
功率容量 Power Handling:	10Watt
工作温度 Operation Temperature:	-30 ~ +60°C
存储温度 Storage Temperature:	-50 ~ +85°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012			 www.lairmw.com sales@lairmw.com	P/N: LSN-3002	
	Approvals	DATE		2 – 18 GHz 16 路功分器 16 Way Power Splitter	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	ENG	CHK	Q.A.
		SIZE	A3	CAGE NO	DWG NO.
		SCALE	3:2	UNIT	mm
		REV	1	SHEET 1 OF 1	