

NOTES:UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY


REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

## LSN-3003

5 – 7.1 GHz 16 路功分器 16 Way Power Divider

### —电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	5 – 7.1 GHz
隔离度 Isolation:	20dB(Max)
插入损耗 Insertion Loss :	2.5dB(Max)
相位平衡 Phase Balance:	±8°(Max)
幅度平衡 Amplitude Balance:	±0.4dB(Max)
输入驻波比 Input VSWR:	≤1.5:1
输出驻波比 Output VSWR:	≤1.3:1
阻抗 Impedance:	50Ω
输入功率 Input Power:	30W(CW)
工作温度 Operation Temperature:	-40~ +85°C
存储温度 Storage Temperature:	-50~ +105°C

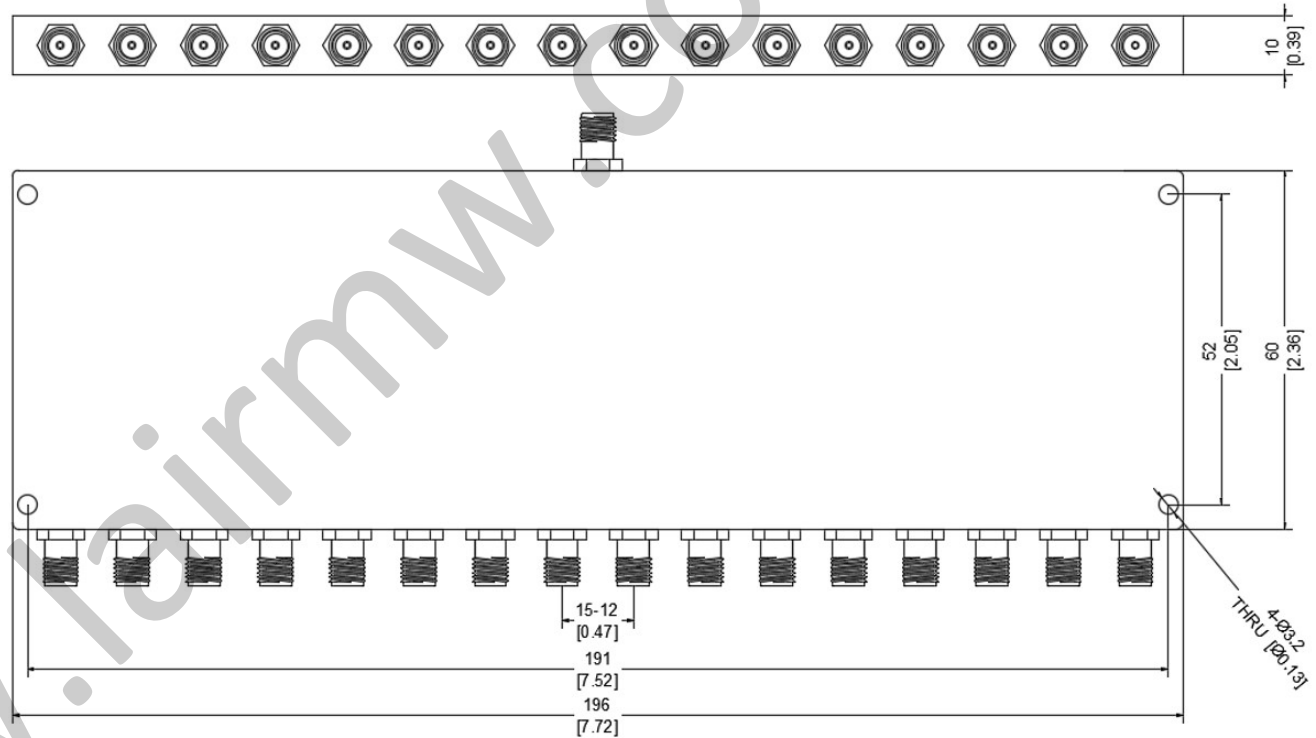

### —机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	/
重量 Weight:	0.5kg

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012					P/N: LSN-3003		
			www.lairmw.com sales@lairmw.com		5 – 7.1 GHz 16 路功分器 16 Way Power Divider		
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN	DATE	SIZE A3	CAGE NO	DWG NO.	REV 1
		CHK		SCALE 3:2	UNIT mm	SHEET 1 OF 1	
		Q.A.					