

60-90 GHz Tunable Attenuator

·····可调衰减器

描述Description

The Lu^o-6001 is a waveguide which operates between 60 and 90 GHz.

which


特点Feature

- 7 k 6 90 8=
- ° k " "

产品规格Specifications	
RF频率RF Frequency [GHz]	60 - 90
衰减范围Attenuation [dB]	0-40可调
插入损耗Insertion Loss [dB]	0.4
RF输入功率RF Input Power[dBm]	20
RF接口RF Port	WR12(UG387/UM)
工作温度Operation Temperature[°C]	+18 ~ +28
储存温度Storage Temperature[°C]	-40 ~ +70

典型性能Typical Performance

Attenuation vs Frequency

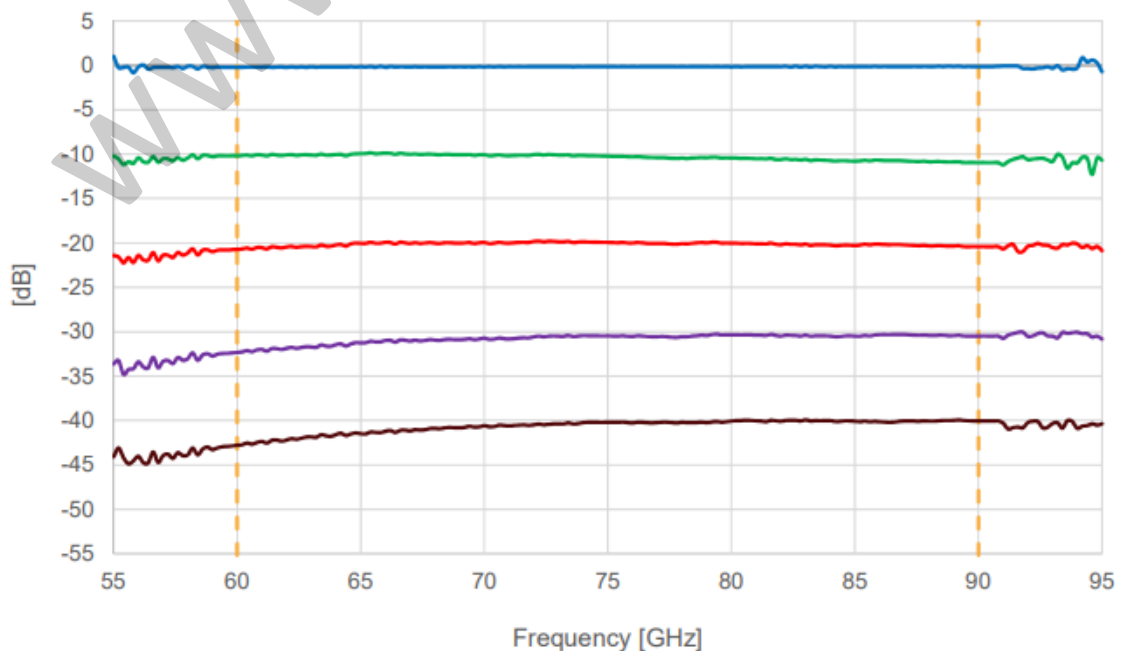

60-90 GHz Tunable Attenuator

可调衰减器

外形尺寸 Overall Dimension

