

90-140 GHz Tunable Attenuator

·····可调衰减器

描述Description

The Lu^o-6003 is a waveguide which operates between 90 and 140 GHz.

特点Feature


- 7 k '90 140'8=
- ° k ' ' " '·····

产品规格Specifications

RF频率RF Frequency [GHz]	90 - 140
衰减范围Attenuation [dB]	0-40可调
插入损耗Insertion Loss [dB]	0.4
RF输入功率RF Input Power[dBm]	20
RF接口RF Port	WR8(UG387/UM)
工作温度Operation Temperature[°C]	+18 ~ +28
储存温度Storage Temperature[°C]	-40 ~ +70

典型性能Typical Performance

Attenuation vs Frequency

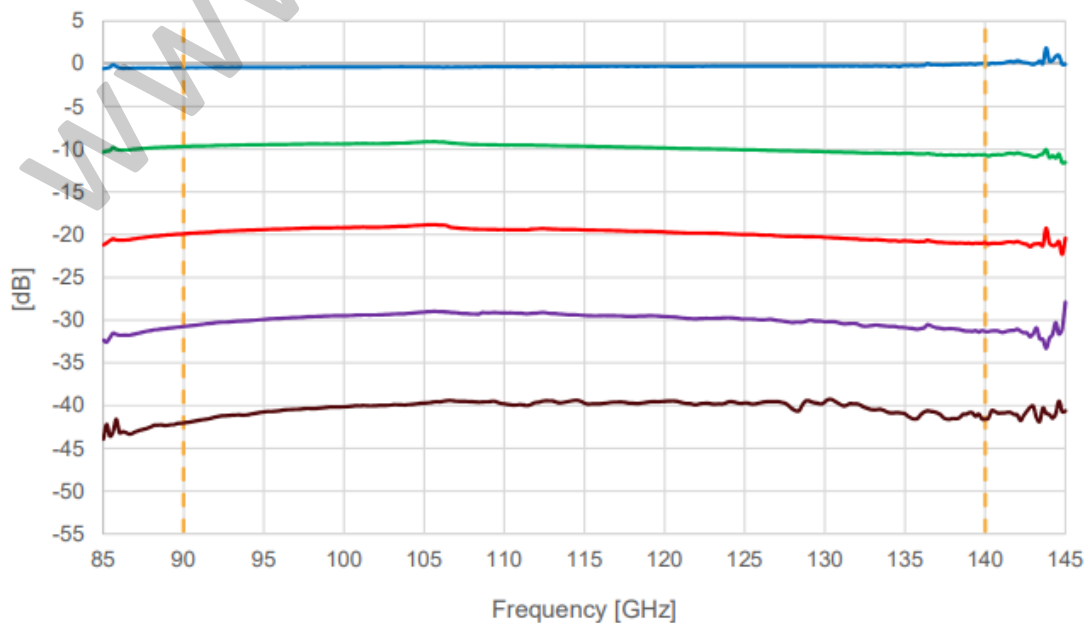

90-140 GHz Tunable Attenuator

可调衰减器

外形尺寸 Overall Dimension

