

260-400 GHz Tunable Attenuator

·····可调衰减器

描述Description


The Lu^o -6005 is a waveguide which operates between 260 and 400 GHz.

特点Feature

- 7 k 260 400 8=
- ° k "

| 产品规格Specifications | |
|-------------------------------|-----------------|
| RF频率RF Frequency [GHz] | 260 - 400 |
| 衰减范围Attenuation [dB] | 0-40可调 |
| 插入损耗Insertion Loss [dB] | 0.7 |
| RF输入功率RF Input Power[dBm] | 20 |
| RF接口RF Port | WR2.8(UG387/UM) |
| 工作温度Operation Temperature[°C] | +18 ~ +28 |
| 储存温度Storage Temperature[°C] | -40 ~ +70 |

典型性能Typical Performance

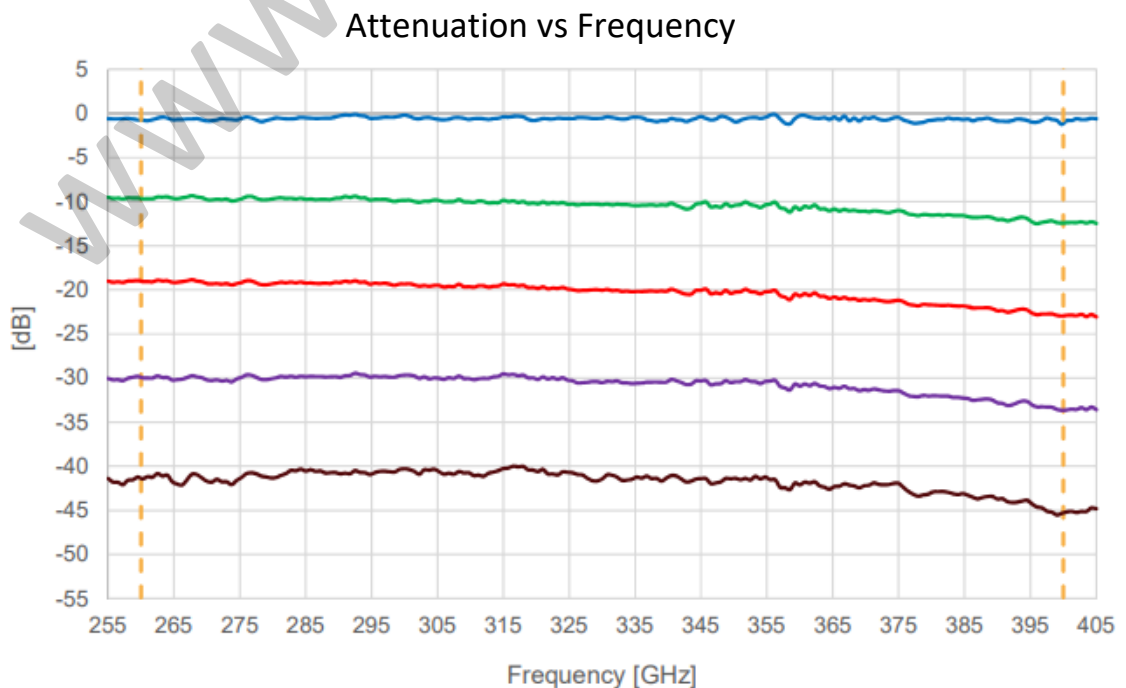

260-400 GHz Tunable Attenuator

可调衰减器

外形尺寸 Overall Dimension

