

## 170-260 GHz Tunable Attenuator

·····可调衰减器

### 描述Description

The Lu<sup>o</sup>-6008 is a waveguide which operates between 170 and 260 GHz.


### 特点Feature

- 7 k 170 260 8=
- ° k " .....

产品规格Specifications	
RF频率RF Frequency [GHz]	170 - 260
衰减范围Attenuation [dB]	0-40可调
插入损耗Insertion Loss [dB]	0.7
RF输入功率RF Input Power[dBm]	20
RF接口RF Port	WR4.3(UG387/UM)
工作温度Operation Temperature[°C]	+18 ~ +28
储存温度Storage Temperature[°C]	-40 ~ +70

### 典型性能Typical Performance

Attenuation vs Frequency

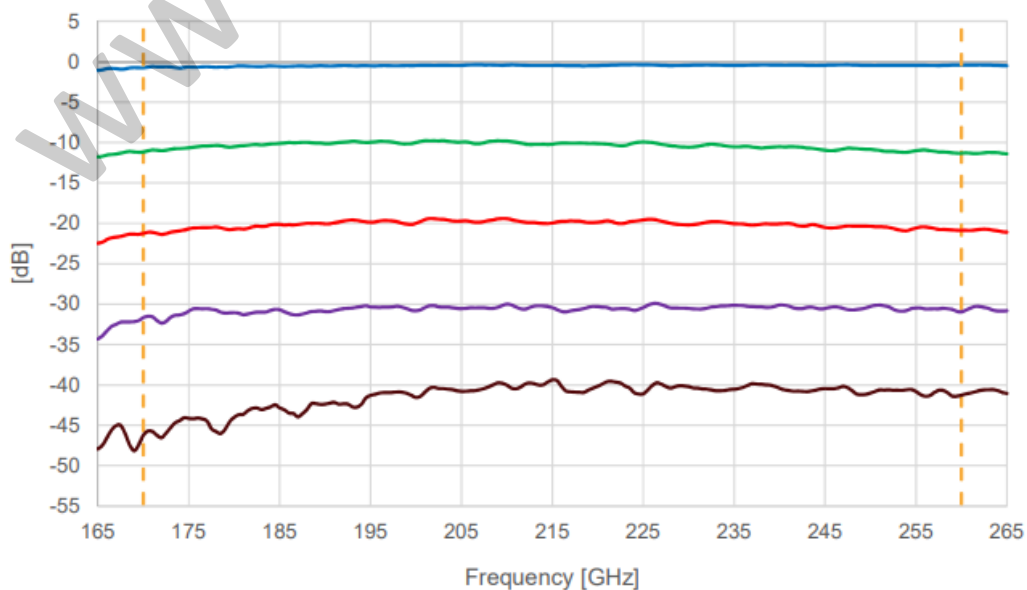

# 170-260 GHz Tunable Attenuator

可调衰减器

## 外形尺寸 Overall Dimension

