

220-330 GHz Tunable Attenuator

·····可调衰减器

描述Description

The Lu^o-6011 is a waveguide which operates between 220 and 330 GHz.


特点Feature

- 7 k 220 330 GHz=
- ° k "·····"

产品规格Specifications	
RF频率RF Frequency [GHz]	220 - 330
衰减范围Attenuation [dB]	0-40可调
插入损耗Insertion Loss [dB]	0.7
RF输入功率RF Input Power[dBm]	20
RF接口RF Port	WR3.4(UG387/UM)
工作温度Operation Temperature[°C]	+18 ~ +28
储存温度Storage Temperature[°C]	-40 ~ +70

典型性能Typical Performance

Attenuation vs Frequency

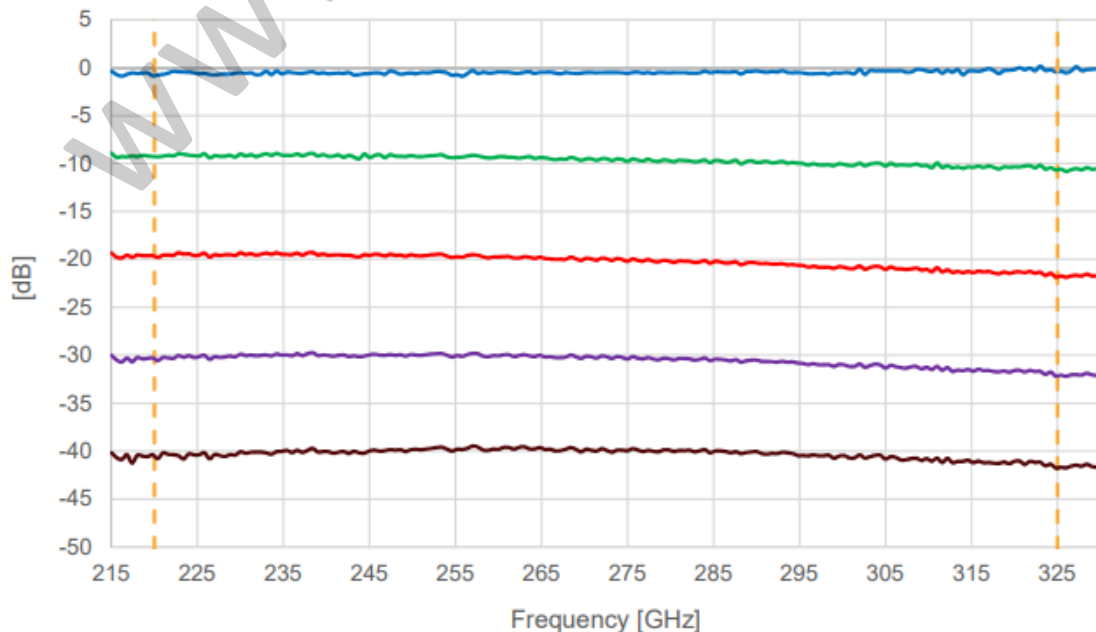

220-330 GHz Tunable Attenuator

可调衰减器

外形尺寸 Overall Dimension

