



NOTES:UNLESS OTHERWISE SPECIFIED  
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

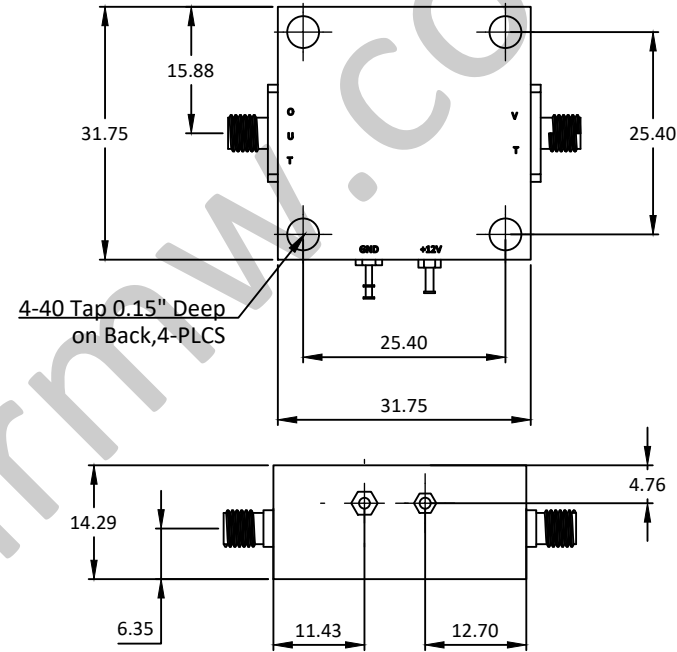

## LVO-5035

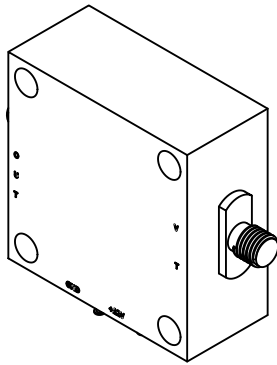


3200 - 3400MHz 压控振荡器 Voltage Controlled Oscillator

### —电气技术参数Electrical Specifications—

频率范围Frequency Range:	3200-3400MHz
调谐电压Tuning Voltage:	0.5-4.5Vdc
调谐灵敏度Tuning Sensitivity:	98MHz/V
输出功率Output Power:	+5dBm
相位噪声Phase Noise:	-88dBc/Hz@10KHz
二次谐波抑制2 <sup>nd</sup> Harmonic Suppression:	-15dBc
直流偏置电压DC Supply Voltage:	+7~+15V
直流偏置电流DC Supply Current:	25mA
工作温度Operation Temperature:	-40~+85℃
存储温度Storage Temperature:	-55~+100℃

### —机械技术参数Mechanical Specification—

输入连接器Input Interface:	SMA-F
输出连接器Output Interface:	SMA-F
尺寸Size(excluding connectors):	/
重量Weight:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012								P/N: LVO-5035											
										www.lairmw.com sales@lairmw.com									
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		<table border="1"> <tr> <td>Approvals</td> <td>DATE</td> </tr> <tr> <td>DRWN</td> <td></td> </tr> <tr> <td>ENG</td> <td></td> </tr> <tr> <td>CHK</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> </table>		Approvals	DATE	DRWN		ENG		CHK		Q.A.		3200-3400MHz 压控振荡器Voltage Controlled Oscillator			
Approvals	DATE																		
DRWN																			
ENG																			
CHK																			
Q.A.																			
SIZE A3		CAGE NO		DWG NO.		REV 1													
SCALE 3:2		UNIT mm		SHEET 1 OF 1															