

# D系列 50GHz超低损耗稳幅稳相电缆组件

D-series 50GHz Ultra Low Loss Phase Stable Cable Assembly


产品规格书  
Specification

产品型号 Part No.

D50-2.4M2.4F-L



外形图 Outline

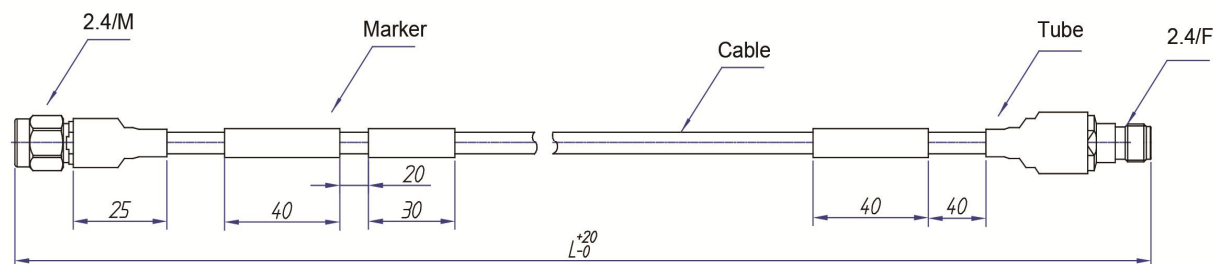

## 电气性能 Electrical Characteristics

工作频率 Frequency	DC - 50 GHz
特性阻抗 Impedance	50 Ω
绝缘电阻 Insulation Resistance	5000 mΩ
介质耐压 Dielectric Withstanding Voltage	1000 V
屏蔽效率 Shielding Effectiveness	≥90 dB
传播速率 Velocity of Propagation	83%
电压驻波比 VSWR	1.30 Max
温度相位稳定性 Phase Stability vs. Temperature	≤550 PPM (-55°C ~ +85°C)
弯曲相位稳定性 Phase Stability vs. Flexure	≤±2°
弯曲幅度稳定性 Amplitude stability	≤0.05 dB

## 机械与环境性能 Mechanical and Environmental Characteristics

电缆外径 Cable Diameter	3.6 mm
最小弯曲半径 Min. Bend Radius	36 mm
工作温度 Operating Temperature Range	-55°C ~ +165°C

## 组件衰减指标 Attenuation

Part No.	18GHz	26.5GHz	40GHz	50GHz
D50-2.4M2.4F-0.5M	1.005 dB	1.235 dB	1.540 dB	1.745 dB
D50-2.4M2.4F-1.0M	1.840 dB	2.260 dB	2.820 dB	3.190 dB
D50-2.4M2.4F-1.5M	2.675 dB	3.285 dB	4.100 dB	4.635 dB
D50-2.4M2.4F-2.0M	3.510 dB	4.310 dB	5.380 dB	6.080 dB
D50-2.4M2.4F-3.0M	5.180 dB	6.360 dB	7.940 dB	8.970 dB
D50-2.4M2.4F-5.0M	8.520 dB	10.460 dB	13.060 dB	14.750 dB

连续波功率 CW Power ( sea level / 25°C)	115 W	93 W	75 W	66 W
------------------------------------	-------	------	------	------

注：电缆组件接头和长度可接受定制 Different connector types and the lengths of D series cable assembly are available.

In the effort to improve our products, Lair Microwave reserves the right to make changes judged to be necessary.

Tel: +86-512-66226676 Fax: +86-512-67564409 E-mail: sales@lairmw.com @ Designed by Lair Microwave