

G系列 40GHz超低损耗稳幅稳相电缆组件

G-series 40GHz Ultra Low Loss Phase Stable Cable Assembly


产品规格书
Specification

产品型号 Part No.

G40-2.92M2.92F-L



外形图 Outline

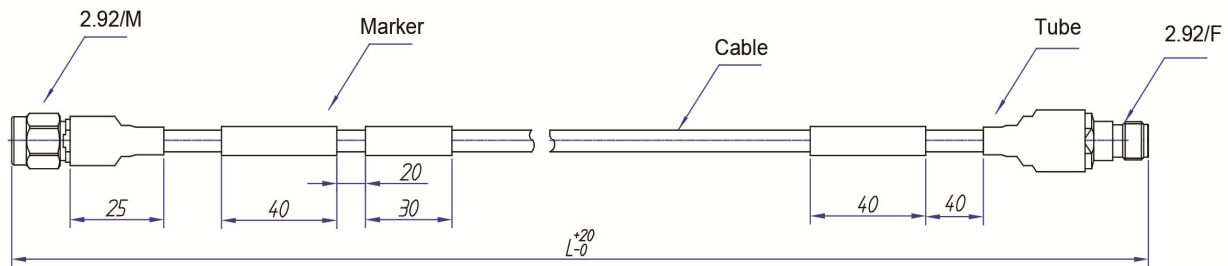

电气性能 Electrical Characteristics

工作频率 Frequency	DC - 40 GHz
特性阻抗 Impedance	50 Ω
绝缘电阻 Insulation Resistance	5000 m Ω
介质耐压 Dielectric Withstanding Voltage	1000 V
屏蔽效率 Shielding Effectiveness	≥ 90 dB
传播速率 Velocity of Propagation	85%
电压驻波比 VSWR	1.25 Max
温度相位稳定性 Phase Stability vs. Temperature	≤ 550 PPM (-55 $^{\circ}$ C ~ +85 $^{\circ}$ C)
弯曲相位稳定性 Phase Stability vs. Flexure	$\leq \pm 1.8^{\circ}$
弯曲幅度稳定性 Amplitude stability	≤ 0.05 dB

机械与环境性能 Mechanical and Environmental Characteristics

电缆外径 Cable Diameter	3.6 mm
最小弯曲半径 Min. Bend Radius	36 mm
工作温度 Operating Temperature Range	-55 $^{\circ}$ C ~ +165 $^{\circ}$ C

组件衰减指标 Attenuation

Part No.	12GHz	18GHz	26.5GHz	40GHz
G40-2.92M2.92F-0.5M	0.82 dB	1.01 dB	1.24 dB	1.54 dB
G40-2.92M2.92F-1.0M	1.49 dB	1.84 dB	2.26 dB	2.82 dB
G40-2.92M2.92F-1.5M	2.17 dB	2.68 dB	3.29 dB	4.10 dB
G40-2.92M2.92F-2.0M	2.84 dB	3.51 dB	4.31 dB	5.38 dB
G40-2.92M2.92F-3.0M	4.19 dB	5.18 dB	6.36 dB	7.94 dB
G40-2.92M2.92F-5.0M	6.89 dB	8.52 dB	10.46 dB	13.06 dB

连续波功率 CW Power (sea level / 25 $^{\circ}$ C)	142 W	115 W	93 W	75 W
---	-------	-------	------	------

注：电缆组件接头和长度可接受定制 Different connector types and the lengths of D series cable assembly are available.

In the effort to improve our products, Lair Microwave reserves the right to make changes judged to be necessary.

Tel: +86-512-66226676 Fax: +86-512-67564409 E-mail: sales@lairmw.com @ Designed by Lair Microwave