

M系列 110GH毫米波电缆组件

M-series 110GHz Millimeter-Wave Cable Assembly


产品规格书
Specification

产品型号 Part No.

M110-1.0M1.0M-L



外形图 Outline

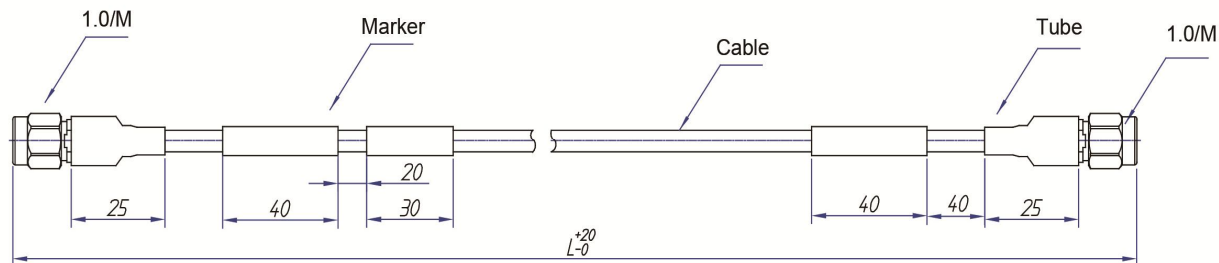

电气性能 Electrical Characteristics

工作频率 Frequency	DC - 110 GHz
特性阻抗 Impedance	50 Ω
绝缘电阻 Insulation Resistance	5000 mΩ
介质耐压 Dielectric Withstanding Voltage	1000 V
屏蔽效率 Shielding Effectiveness	≥90 dB
传播速率 Velocity of Propagation	75%
电压驻波比 VSWR	1.45 Max
温度相位稳定性 Phase Stability vs. Temperature	≤550 PPM (-55°C ~ +85°C)
弯曲相位稳定性 Phase Stability vs. Flexure	≤±5°
弯曲幅度稳定性 Amplitude stability	≤0.05 dB

机械与环境性能 Mechanical and Environmental Characteristics

电缆外径 Cable Diameter	2.54 mm
最小弯曲半径 Min. Bend Radius	25.4 mm
工作温度 Operating Temperature Range	-65°C ~ +200°C

组件衰减指标 Attenuation

Part No.	50GHz	67GHz	90GHz	110GHz
M110-1.0M1.0M-0.5M	5.23 dB	6.26 dB	7.52 dB	8.55 dB
M110-1.0M1.0M-1.0M	10.18 dB	12.19 dB	14.65 dB	16.66 dB
M110-1.0M1.0M-1.5M	15.14 dB	18.12 dB	21.79 dB	24.77 dB
M110-1.0M1.0M-2.0M	20.09 dB	24.04 dB	28.93 dB	32.88 dB
M110-1.0M1.0M-3.0M	29.99 dB	35.90 dB	43.20 dB	49.12 dB
M110-1.0M1.0M-5.0M	49.80 dB	59.62 dB	71.75 dB	81.58 dB

连续波功率 CW Power (sea level / 25°C)	23 W	19 W	15 W	12 W
------------------------------------	------	------	------	------

注：电缆组件接头和长度可接受定制 Different connector types and the lengths of D series cable assembly are available.

In the effort to improve our products, Lair Microwave reserves the right to make changes judged to be necessary.

Tel: +86-512-66226676 Fax: +86-512-67564409 E-mail: sales@lairmw.com @ Designed by Lair Microwave