

# L系列 6GHz 低损耗柔性电缆组件

L-series 6GHz Low Loss Flexible Cable Assembly


产品规格书  
Specification

产品型号 Part No.

L600-NMNM-L



外形图 Outline

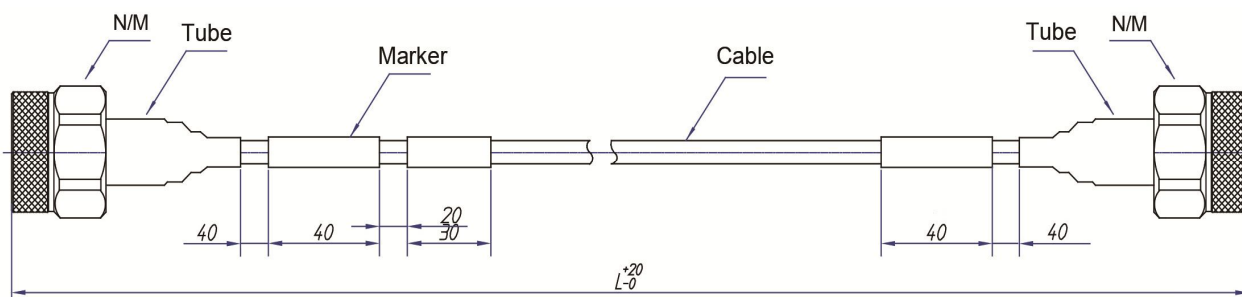

## 电气性能 Electrical Characteristics

工作频率 Frequency	DC - 6 GHz
特性阻抗 Impedance	50 Ω
电容 Capacitance	76pF/m
直流测试电压 Voltage	4600 V
传播速率 Velocity of Propagation	87%
电压驻波比 VSWR	1.30 Max

## 机械与环境性能 Mechanical and Environmental Characteristics

电缆外径 Cable Diameter	14.99 mm
最小弯曲半径 Min. Bend Radius	38.1 mm
工作温度 Operating Temperature Range	-40°C ~ +85°C

## 组件衰减指标 Attenuation

Part No.	0.9GHz	2.5GHz	3GHz	6GHz
L600-NMNM-1M	0.14 dB	0.25 dB	0.27 dB	0.40 dB
L600-NMNM-5M	0.46 dB	0.85 dB	0.91 dB	1.40 dB
L600-NMNM-10M	1.86 dB	1.60 dB	1.71 dB	2.65 dB
L600-NMNM-20M	1.66 dB	3.10 dB	3.31 dB	5.15 dB
L600-NMNM-30M	2.46 dB	4.60 dB	4.91 dB	7.65 dB
L600-NMNM-50M	4.06 dB	7.60 dB	8.11 dB	12.65 dB

注：电缆组件接头和长度可接受定制 Different connector types and the lengths of D series cable assembly are available.

In the effort to improve our products, Lair Microwave reserves the right to make changes judged to be necessary.

Tel: +86-512-66226676 Fax: +86-512-67564409 E-mail: sales@lairmw.com @ Designed by Lair Microwave