


Product Specifications



RG58C/U

Flexible coaxial cable, 50ohm RG58 type

Applied standard: MIL-C-17

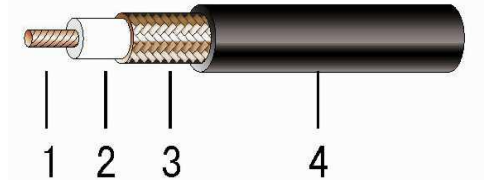

Construction 结构	Materials 材料	O.D (mm)尺寸
1.内导体Inner conductor	镀锡铜绞线BC	0.18X19±0.01mm
2.绝缘Dielectric	聚乙烯PE	2.95±0.10mm
3.外导体Outer conductor	镀锡铜线编织Tinned copper braid	3.50 Nom.
4.护套Jacket	黑色聚氯乙烯Black PVC	5.0±0.15mm

Electrical Specifications 电性能

阻抗Cable impedance	50 ohm
电容Capacitance	101.05 pF/m
速率Velocity	67%
工作电压Working voltage	1400 Vrms
工作频率Operating frequency	1 GHz Max.

Mechanical & Environmental Specifications 机械环境性能

弯曲半径Bend radius	25 mm
温度范围Temperature range	-25 ~ +70 °C
环保RoHS compliance	Compliant

Attenuation Typical Value 衰减典型值

Frequency(MHz)	Attenuation(dB/m)
@ 25°C & sea level	Typical
100	0.151
400	0.308
1000	0.502

In the effort to improve our products, Lair Microwave reserves the right to make changes judged to be necessary.

Tel: +86-512-66226676 Fax: +86-512-67564409 E-mail: sales@lairmw.com @ Designed by Lair Microwave