


NOTES: UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING, DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

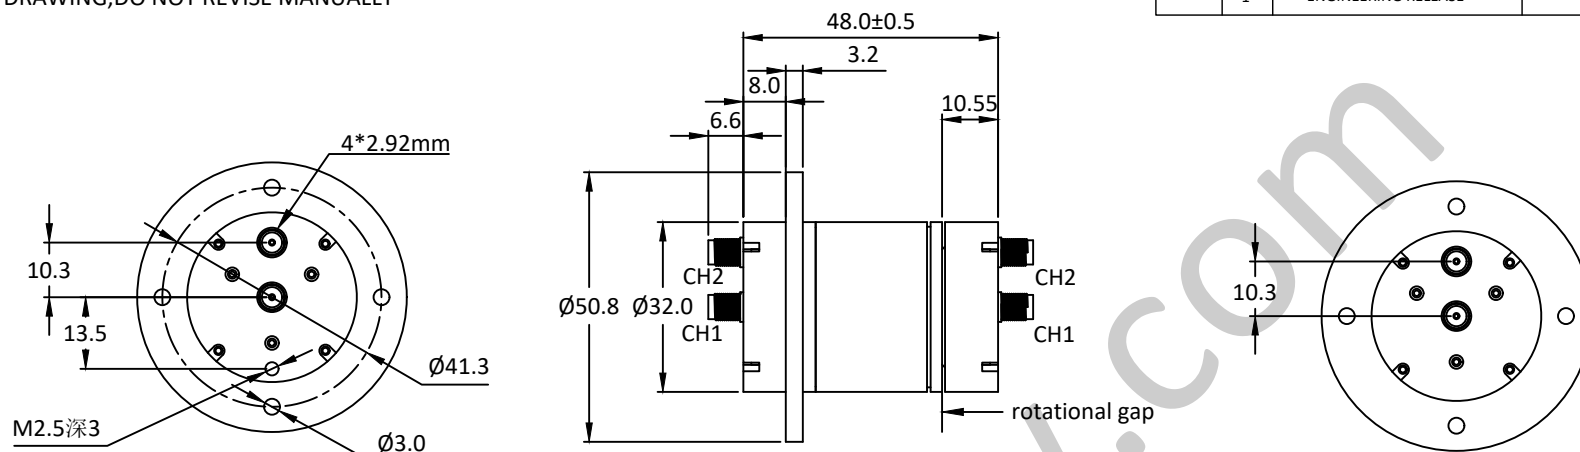

LRJ-1015


双通道旋转关节 Dual Channel Rotary Joint

—电气技术参数 Electrical Specifications—

通道 Channel:	CH1	CH2
工作频率 Frequency Range:	DC - 18GHz	DC - 18GHz
插入损耗 Insertion Loss:	0.4dB@DC-8GHz 1.0dB@8-18GHz	0.75dB@DC-4GHz 1.5dB@4-8GHz 2.5dB@8-12GHz 3.0dB@12-18GHz
插入损耗最大波动值:	0.05dB	0.1dB@DC-4GHz 0.3dB@4-8GHz 0.75dB@8-12GHz 1.5dB@12-18GHz
电压驻波比 VSWR:	1.35@DC-8GHz 1.75@8-18GHz	2@DC-4GHz 3@4-8GHz 3.5@8-12GHz 4.5@12-18GHz
驻波比最大波动值:	0.05	0.1@DC-4GHz 0.35@4-8GHz 0.8@8-12GHz 2.0@12-18GHz
耐功率 Power:	50W(CW)@1GHz 2kW(Peak)	50W(CW)@1GHz 2kW(Peak)
工作温度 Operation Temperature:	-40~+70 °C	
存储温度 Storage Temperature:	-55~+85 °C	
转动速度 Speed:	50rpm(Max)	
寿命 Life:	21*10 ⁶ 转 (Min)	

—机械技术参数 Mechanical Specification—

接口 Connectors:	2.92mm-F@CH1&2
样式 Type:	I
重量 Weight:	284g

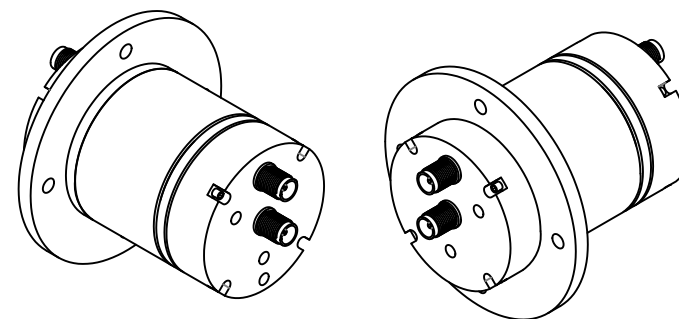

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1' ±2/5 .XXX±0.012						P/N: LRJ-1015	
		Approvals	DATE	DUAL CHANNEL COAX ROTARY JOINT 双通道同轴旋转关节			
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +05/-02 +10/-03 +15/-03 +20/-03 +25/-03 +30/-03	DRWN		SIZE A3	CAGE NO	DWG NO.	REV 1
		ENG		SCALE 3:2	UNIT mm	SHEET 1 OF 1	
		CHK					
		Q.A.					